

I D

Texam
HOME



ID

IDENTITY DESIGN

ID - sta per identità.

L'identità per ogni individuo è un elemento fondamentale per riconoscere la personalità, il gusto e lo spirito. La collezione presenta le immagini con soluzioni cromatiche e grafiche variegate. Alcune di queste si adattano a un gusto più moderno con colori decisi, altre fanno riferimento fondamentale ad un immaginario collettivo e una contaminazione stilistica poliedrica. Una delle caratteristiche principali del ID consiste nell'utilizzo di vari basi materiali che vanno ad interpretare e coniugare l'immagine sovrapposta. Questa molteplice impostazione stilistica dei soggetti permette di utilizzare le immagini classiche nei luoghi moderni e viceversa. Le immagini ed i colori nel loro insieme ispirano il designer a creare gli ambienti personalizzati.

Ideato e prodotto in Italia

ID stands for identity.

Identity is a fundamental element for recognising the personality, taste, and spirit of every person. ID is a collection of images in a variety of colours and graphical solutions. Some of them adapt to a modern taste by using decisive colours; others refer to our basic, collective imagination with a stylistic mix that has many different facets. One of the main features of the ID collection is its use of different underlying materials that interpret the overlaid image and combine with it. This multiple stylistic approach to the designs makes it possible to use classical images in modern settings, or vice-versa. The overall effect of these images and colours inspires the interior designer to create personalised environments.

Designed and made in Italy

Texam
HOME



- Spectrum
- Onix
- Diagonal
- Inlay

- Maya
- Rusted
- Transition Tropic
- Tropical Dream



- Aquarell
- Concrete S
- Raw
- Concrete

SPECTRUM

PROFIROL



PROFIROL



ID401 | KAJAL



400 | NINEA

SPECTRUM

SPECTRUM



Technique/technology: Digital print on non-woven backing
Weight: ~183 g/m² (x 5x)
Thickness: 50 µm
Type of support: No woven 130 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Strippable



90 cm / 35.4 in

COLOR RANGE



NB:
- the product is available also with a custom size for each project, for any request contact info@texahome.com
- the portrayed colours may differ from reality

ID400 | NINFA

PROFIROL



PROFIROL



PROFIROL



ID401

SPECTRUM

SPECTRUM



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:



ID40

PROFIROL



PROFIROL



ID401



SPECTRUM

SPECTRUM



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:

PROFIROL



ID401




PROFIROL



PROFIROL



ID404

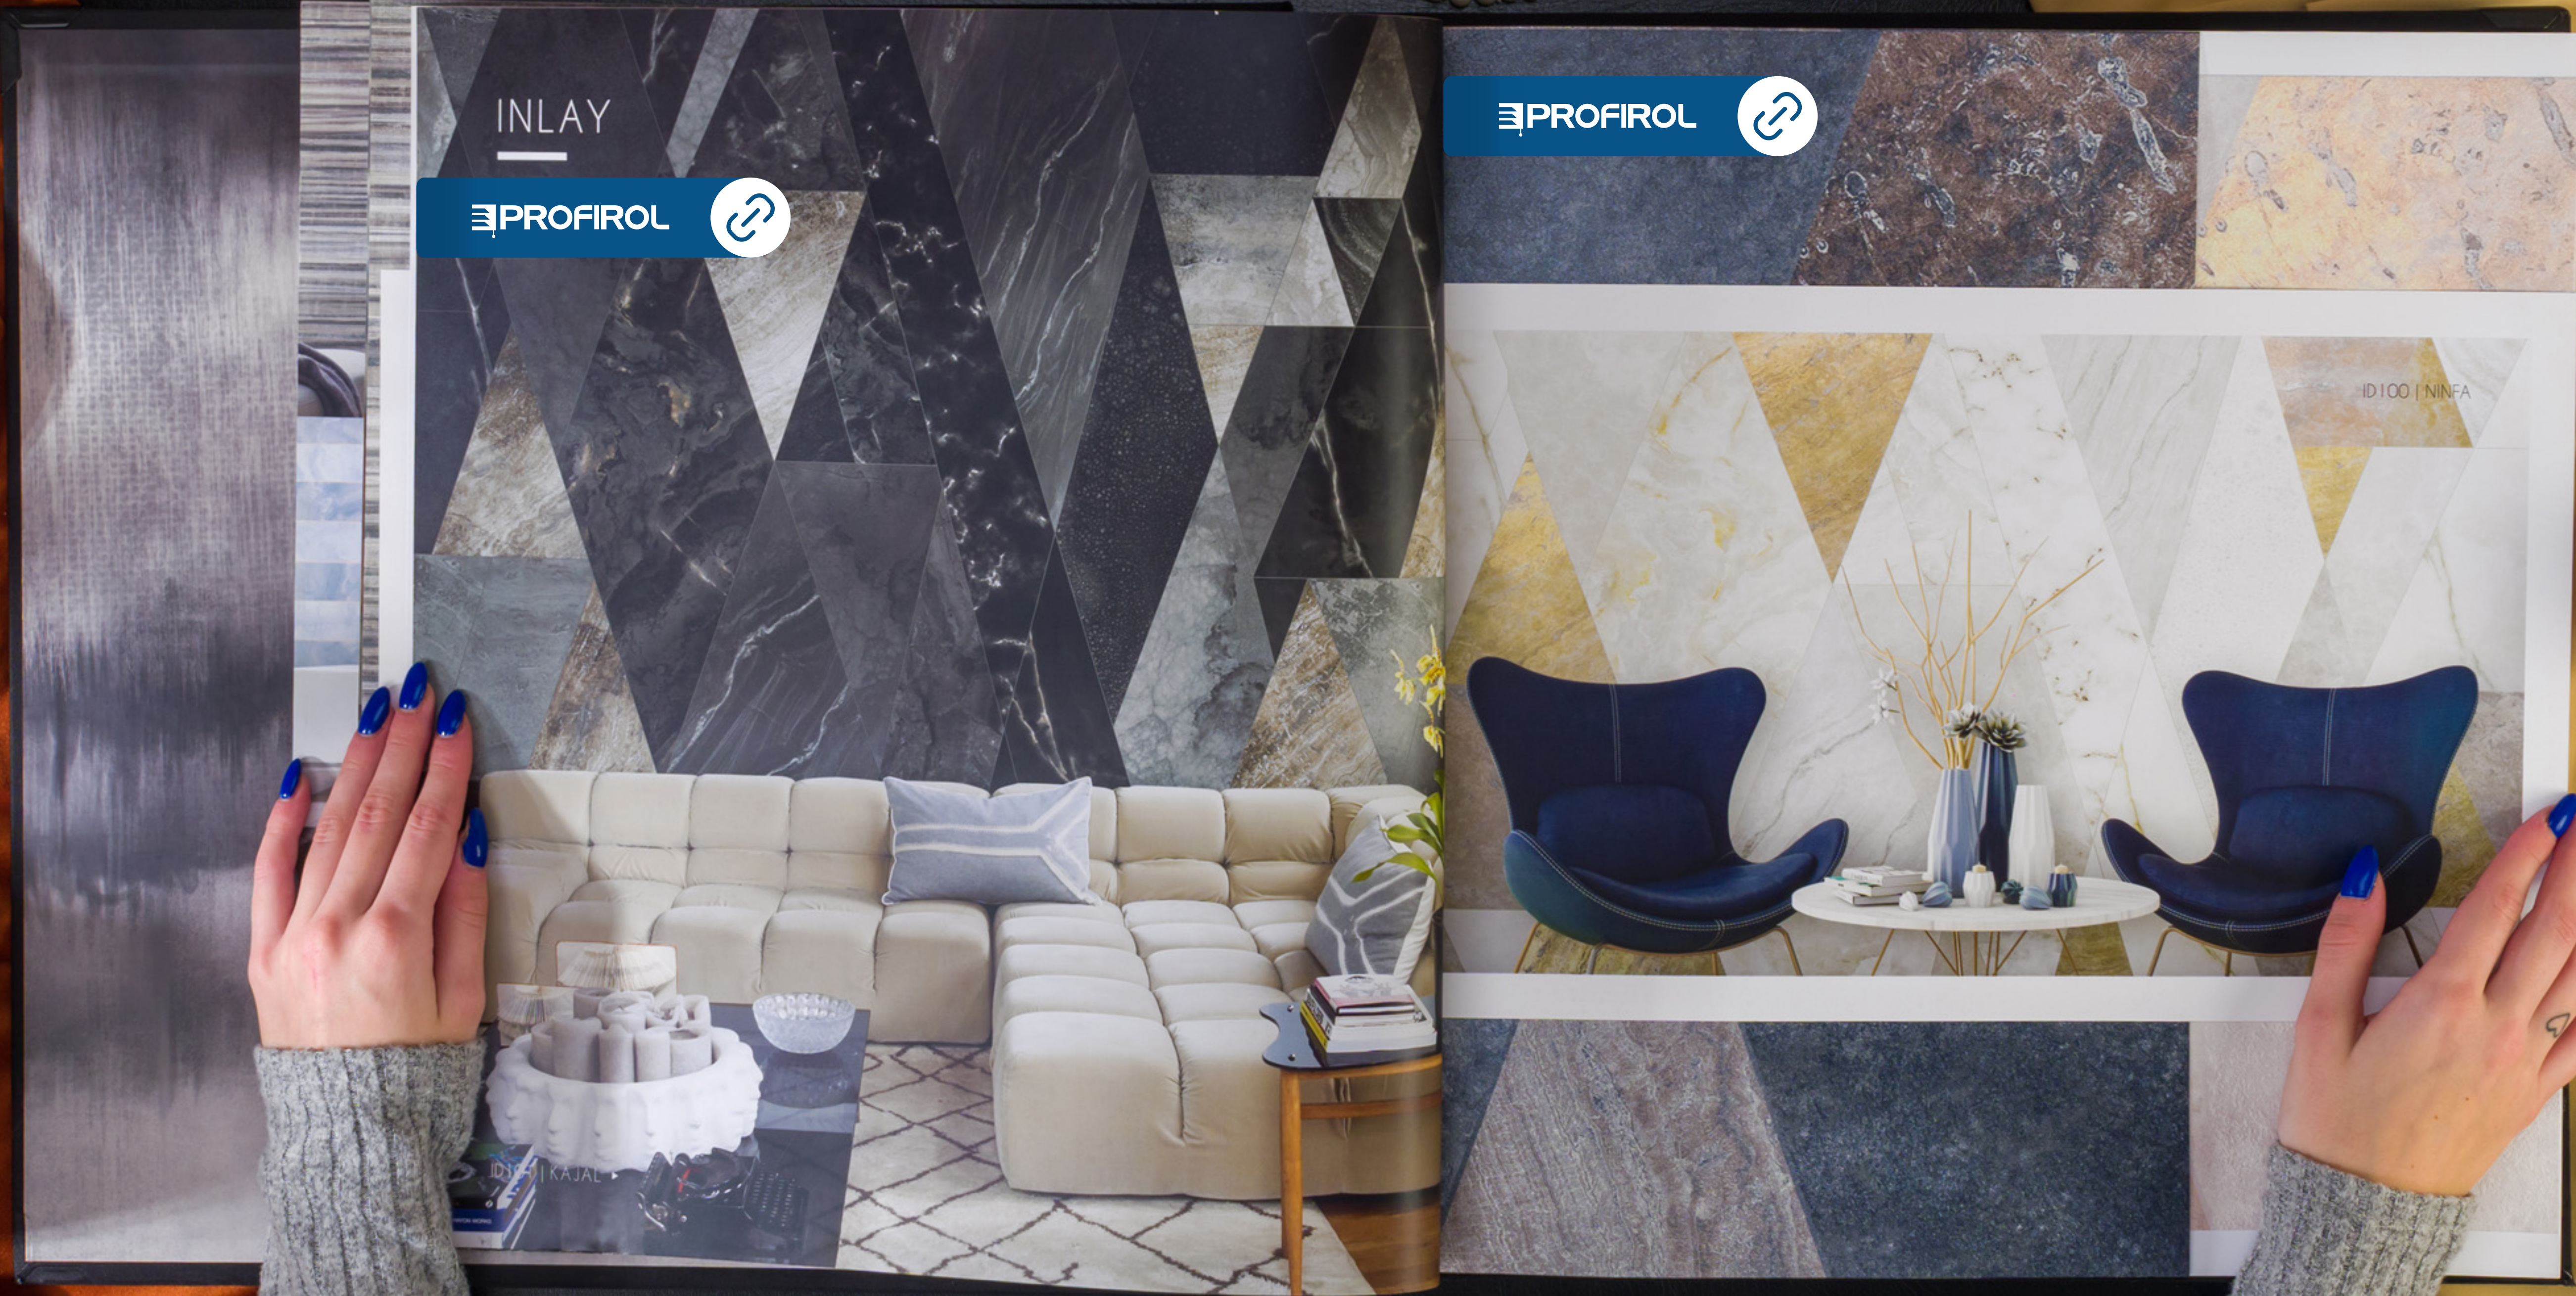

INLAY

PROFIROL



PROFIROL





ID 100 | NINFA

ID 101 | KAJAL

INLAY

INLAY

 Sheet of self-adhesive tile (100x100 cm)	 Match	 Fixing	 Recyclable	 Adhesive	 Light Resistance	 How to remove	 Durability
---	--	--	---	---	---	--	---

Technique/technology: Digital print on non-woven backing
Weight: ~183 g/m² (+ 5%)
Thickness: 50 µm
Type of support: No woven 130 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Steppable

COLOR RANGE



NB: The product is available also with a custom size for each project. For any request, contact info@evanhome.com. The portrayed colours may differ from reality.



INLAY

INLAY



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:



PROFIROL



ID100

ONIX

PROFIROL




PROFIROL




ONIX

ONIX

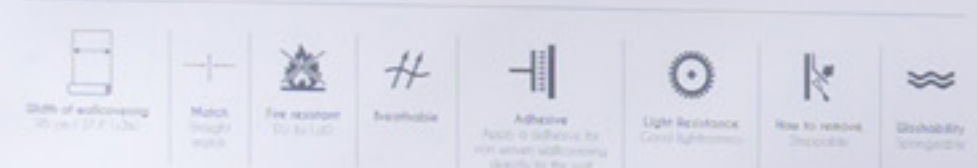

Technique/technology: Digital print on non-woven backing
Weight: ~183 g/m² (+ 5%)
Thickness: 50 µm
Type of support: No woven / 30 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Stripable

COLOR RANGE

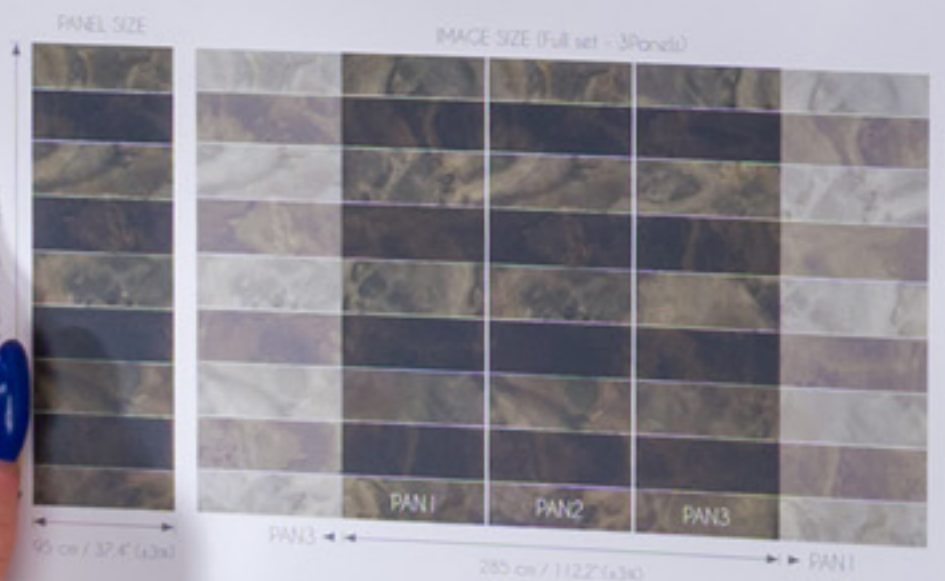

NB:
- the product is available also with a custom size for each project, for any request contact info@exohome.com
- the portrayed colours may differ from reality

ID200 | NINFA ▶






ONIX

ONIX

Width of uniformity 100 cm x 33 cm	Match 100 cm	Fire resistance EN 13501-1	Scratch resistance EN 12004	Adhesive EN 12004

Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:

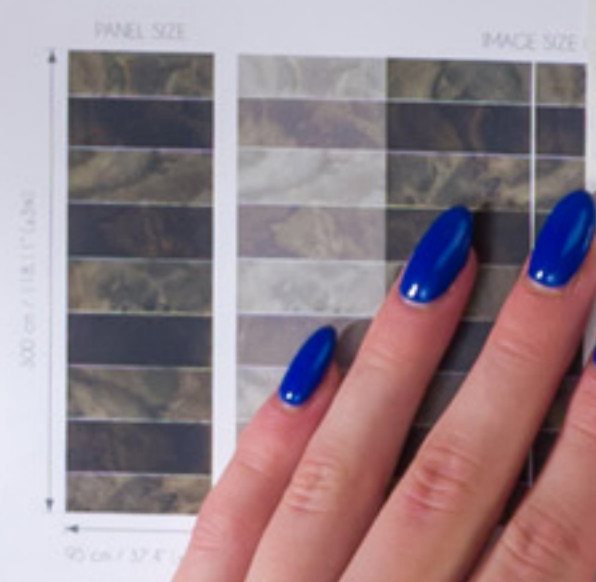

PROFIROL

PROFIROL

ID201

DIAGONAL

PROFIROL 

ID301 | KAJAL


ID300 | NINFA ▶

A FRAME FOR LIFE
ANOTHER MAGAZINE
DUKOTE JOHNSON



DIAGONAL

DIAGONAL

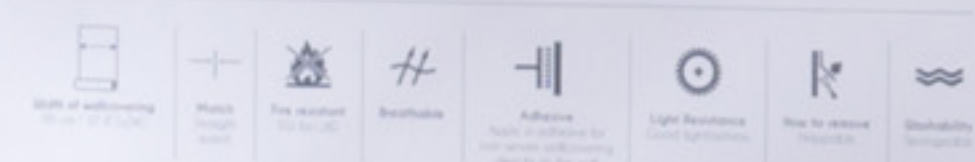

Technique/technology: Digital print on non-woven backing
Weight: ~185 g/m² (± 5%)
Thickness: 50 µm
Type of support: No woven 130 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Stripable

COLOR RANGE



N.B.
- The product is available also with a custom size for each project for any request contact info@lexahome.com
- The portrayed colours may differ from reality

PROFIROL



PROFIROL



0300 | NINFA ▶

A FRAME FOR LIFE

Another Magazine Dakota Johnson


various articles interior spaces

DIAGONAL

DIAGONAL



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:

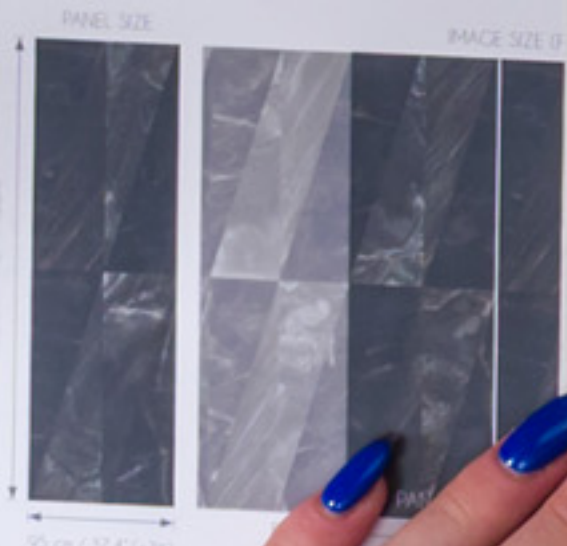

ID301

RUSTED



ID501 | KAJAL ▶

PROFIROL



ID504 | FILICREE

ID502

ID504

RUSTED

RUSTED




Technique/technology: Digital print on non-woven backing
Weight: ≈ 183 g/m² (± 5%)
Thickness: 50 µm
Type of support: No woven 130 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Strippable

COLOR RANGE



NB:
- the product is available also with a custom size for each project.
for any request contact info@texahome.com
- the portrayed colours may differ from reality.

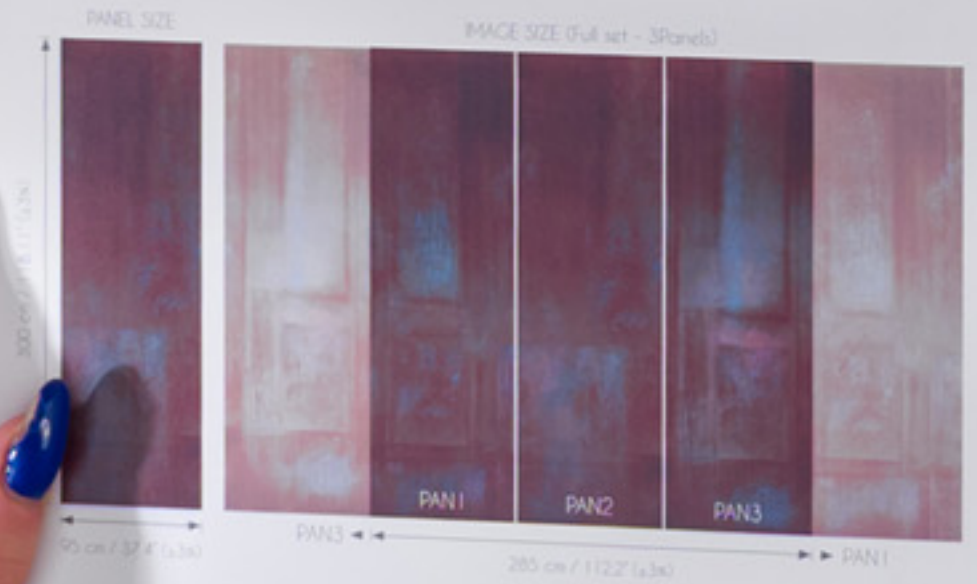

ID501 | KAJAL ▶



ID502

ID504




RUSTED

RUSTED

- Mode of application: Digital print on non-woven
- Plus: Digital print on non-woven
- The material: Digital print on non-woven
- Available: Digital print on non-woven
- Adhesive: Digital print on non-woven
- Light Resistance: Digital print on non-woven
- How to remove: Digital print on non-woven

Technique/technology: Digital print on non-woven
 Weight: ~183 g/m²
 Thickness: ~1.83 mm
 Type of support: No cover
 Match: Straight
 How to paste: Paste
 How to remove: See

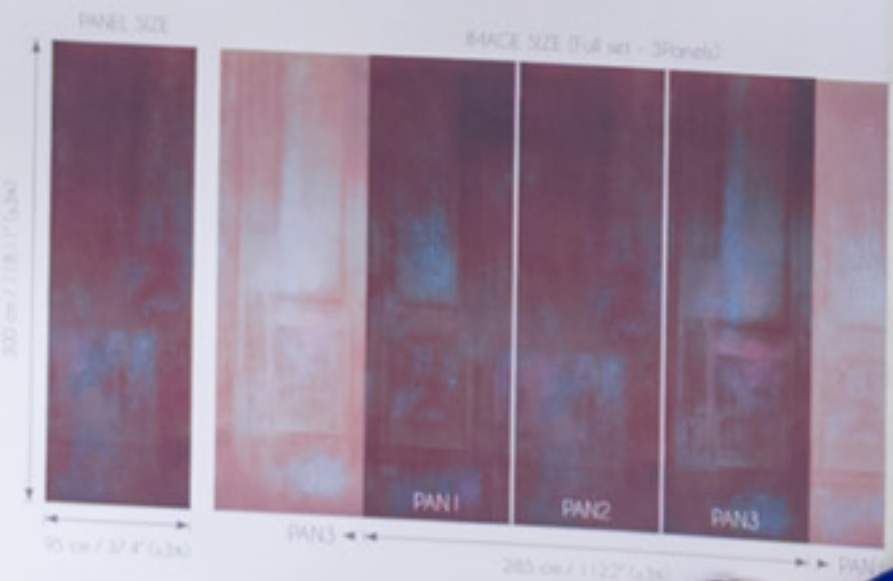

ID501 | KAJAL

PROFIROL

PROFIROL

PROFIROL

ID502

ID504




RUSTED

RUSTED

Width of wall panel	Match	For outdoor	Resistant	Adhesive

Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:

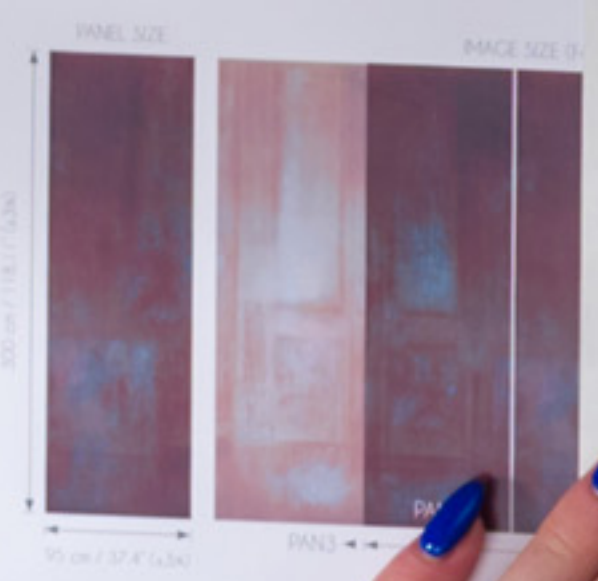

ID501 | K

PROFIROL

PROFIROL


ID502

ID504



RUSTED

RUSTED



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:



ID50

PROFIROL 

ID502

ID504

PROFIROL



PROFIROL




ID505



TROPICAL DREAM

PROFIROL

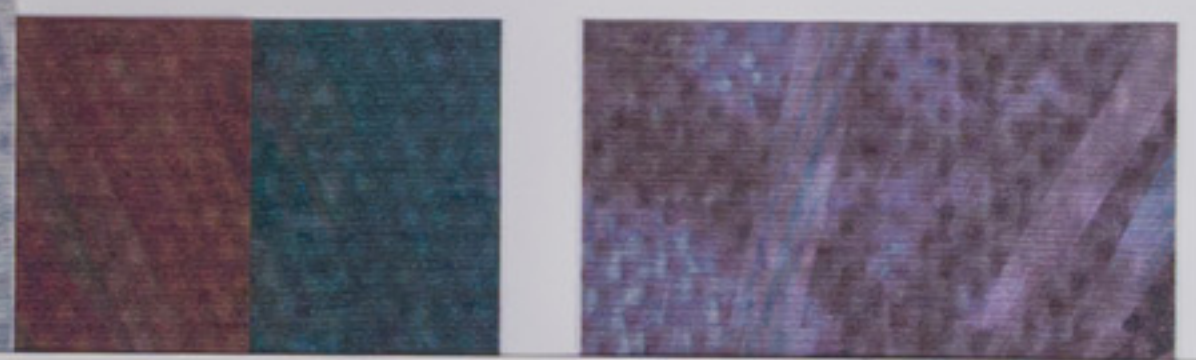

PROFIROL



ID605 | SEALING WAX



ID605

ID603

ID600 | NINFA ▶

TROPICAL DREAM

TROPICAL DREAM






Technique/technology: Digital print on non-woven backing
Weight: ~183 g/m² G 540
Thickness: 50 µm
Type of support: No woven / 30 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Strippable

COLOR RANGE



N.B.
- the product is available also with a custom size for each project
for any request contact info@profirrol.com
- the portrayed colours may differ from reality

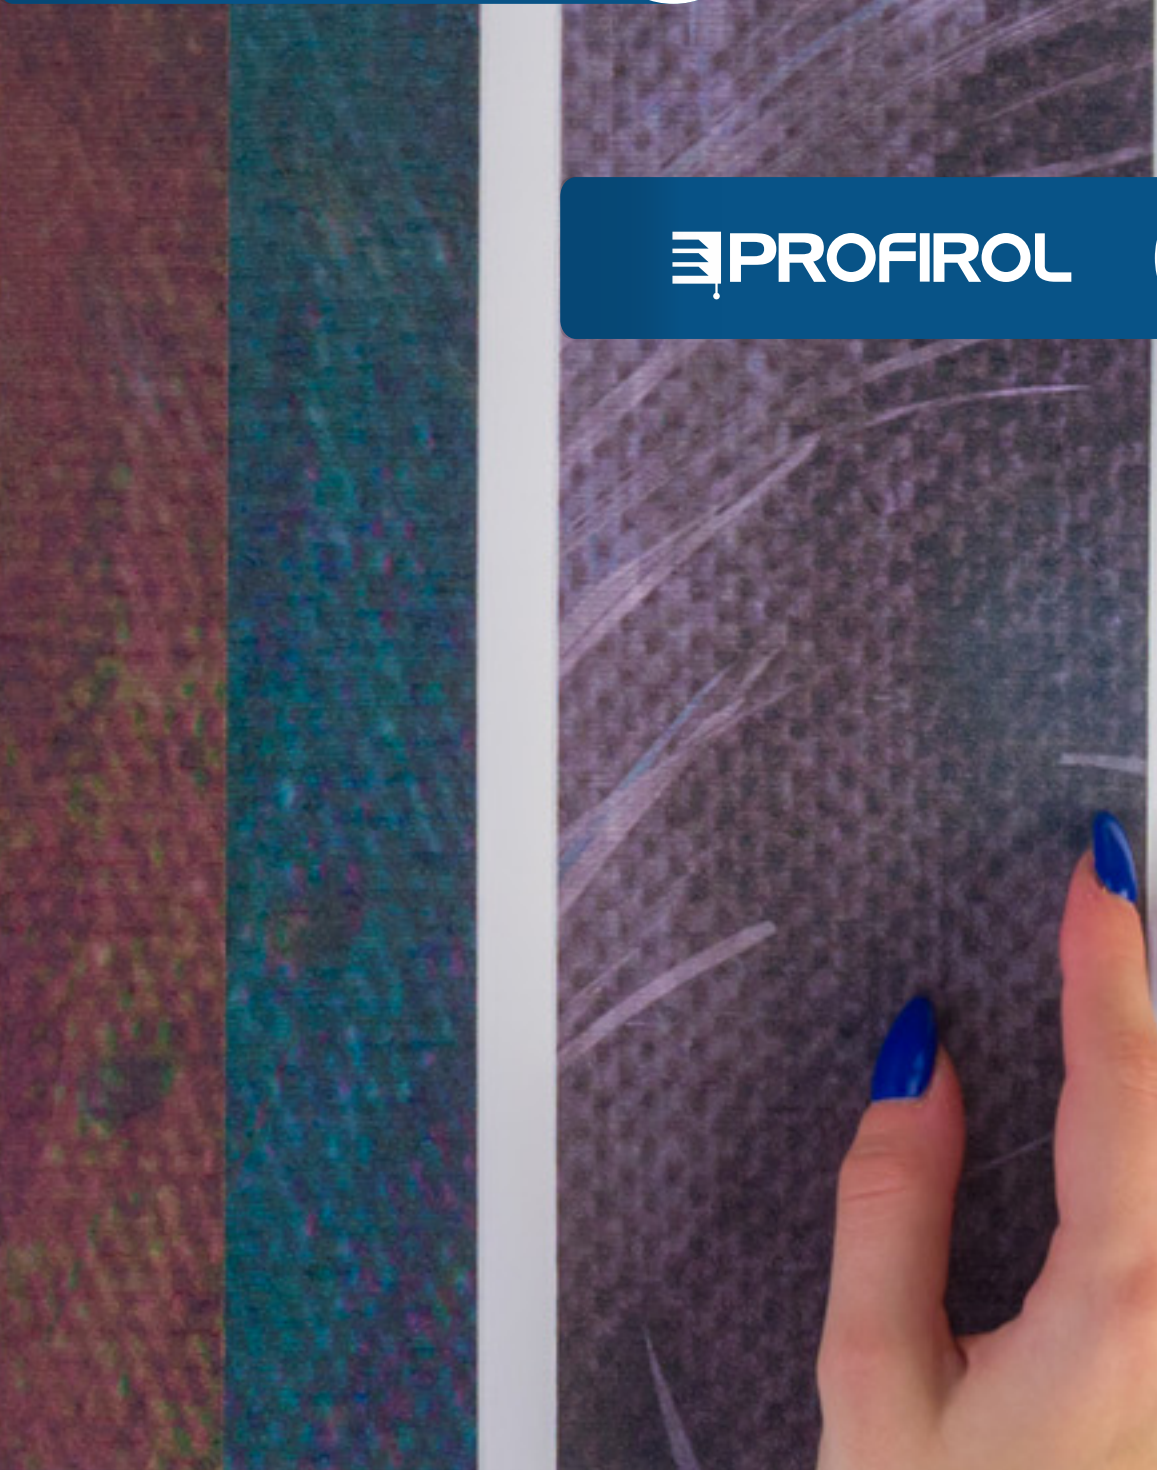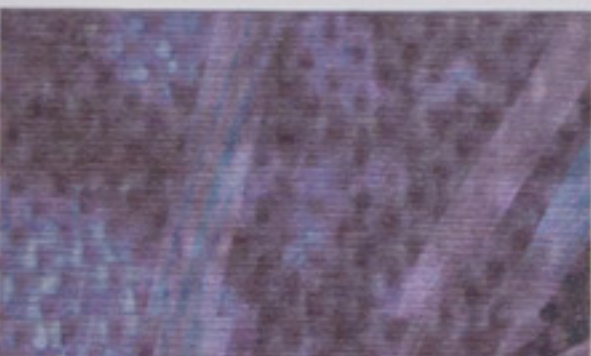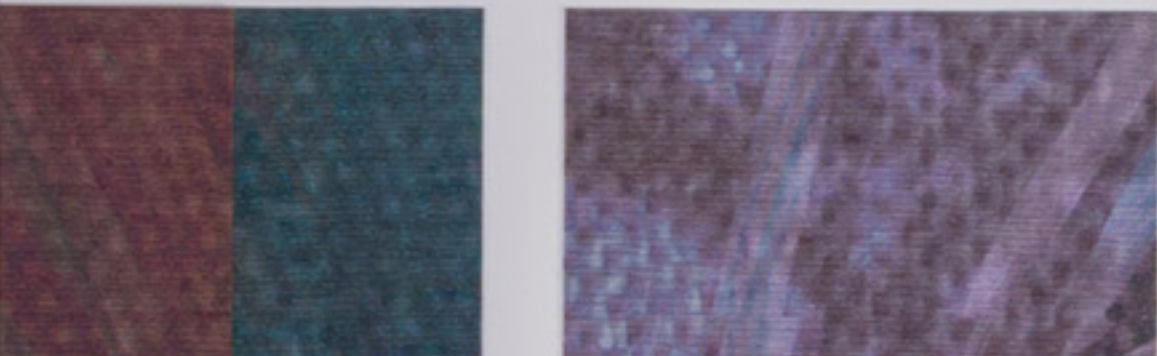

ID605 ID603


ID600 | NINFA ▶

TROPICAL DREAM

TROPICAL DREAM

- Scale of artwork: 100 cm x 100 cm
- Match: Straight match
- Fire resistant: No
- Washable: No
- Adhesive: 3M VHB (to be used on non-porous surfaces)
- Light resistance: Class 4 (outstanding)
- How to remove: Use the correct procedure
- Stretchable: No

Technique/technology: Digital print on non-woven backing
Weight: ~183 g/m² (x 50)
Thickness: 50 µm
Type of support: No woven / 30 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Strippable

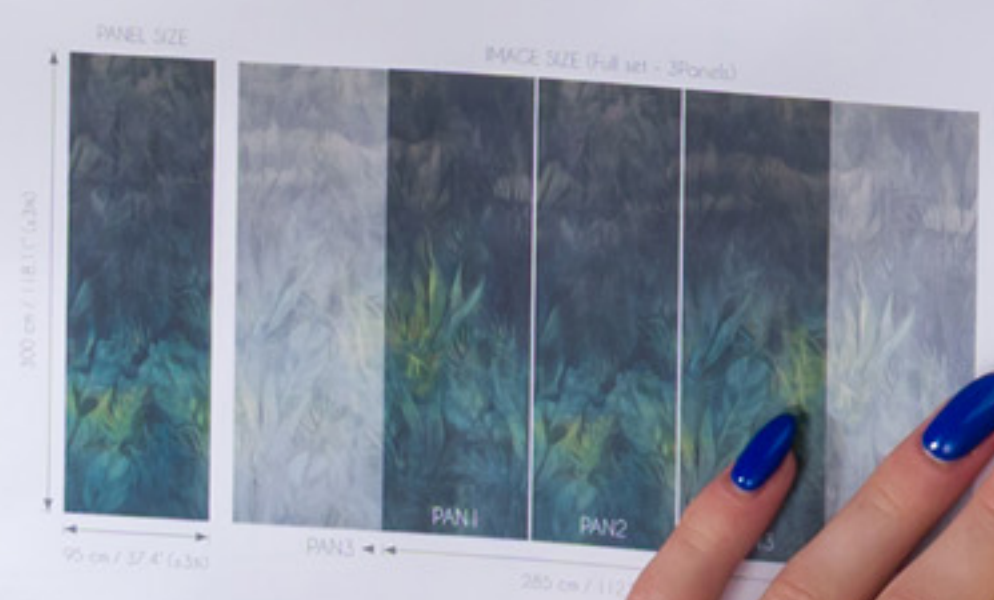

ID600 | NINFA



ID605

ID603




TROPICAL DREAM

TROPICAL DREAM



Technique/technology: Digital print on non-woven
Weight: 183
Thickness: 1.2
Type of support: No w
Match: Sr
How to paste: p
How to remove: p

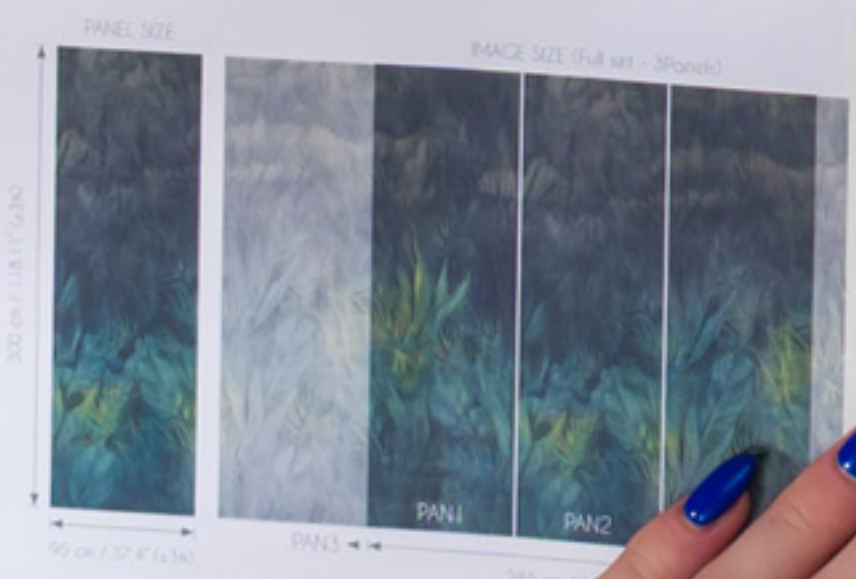

ID600 | NINFA

PROFIROL



PROFIROL



ID605

ID603




FALL

FALL



Technique/technology: Digital print on non-woven backing
Weight: ~163 g/m² (x.5k)
Thickness: 50 µm
Type of support: No woven 130 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Strippable

COLOR RANGE

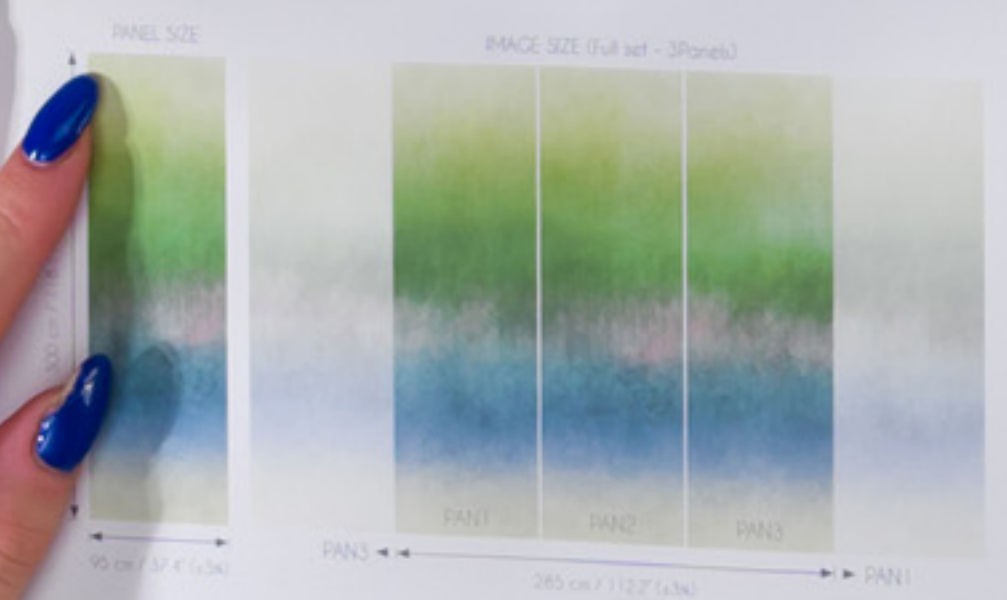

N.B. The product is available also with a custom size for each panel. For any request contact info@excehome.com. The portrayed colours may differ from reality.




ID704 ID703

FALL

FALL

- Wall or wallpaper
- Match
- Fire resistant
- Washable
- Adhesive
- Light resistance
- How to remove
- Washability

Technique/technology: Digital print on non-woven backing
Weight: ~165 g/m² (± 5%)
Thickness: 50 µm
Type of support: No woven / 30 or Straight match
Match: Paste the wall
How to paste: Strippable
How to remove:

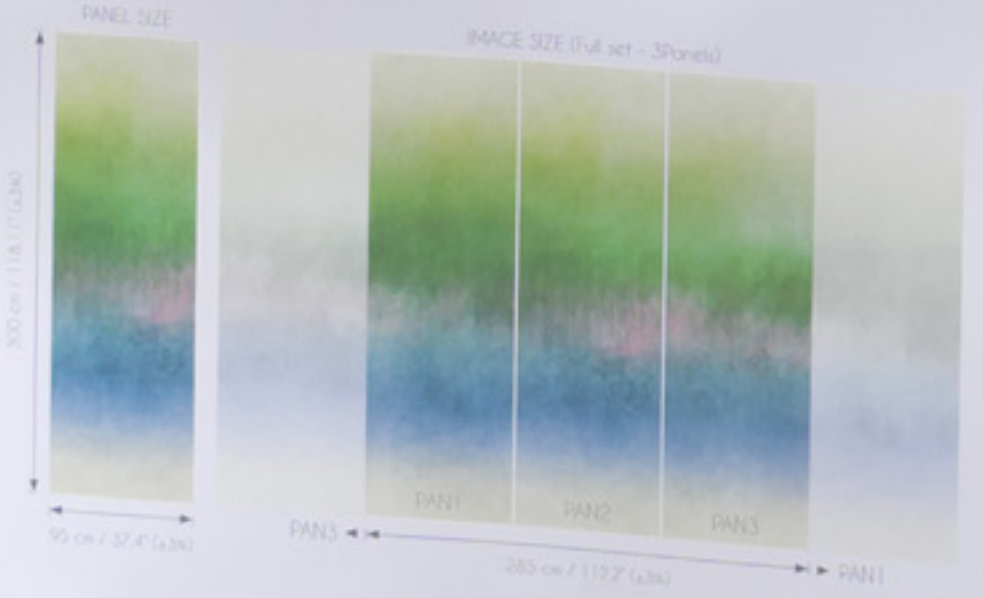

ID702 | BASALT

PROFIROL



PROFIROL



ID704


ID703

FALL

FALL



Technique/technology: Digital print on non-woven
Weight: ~18,3
Thickness:
Type of support: No set
Match: 5m
How to paste: R
How to remove: R

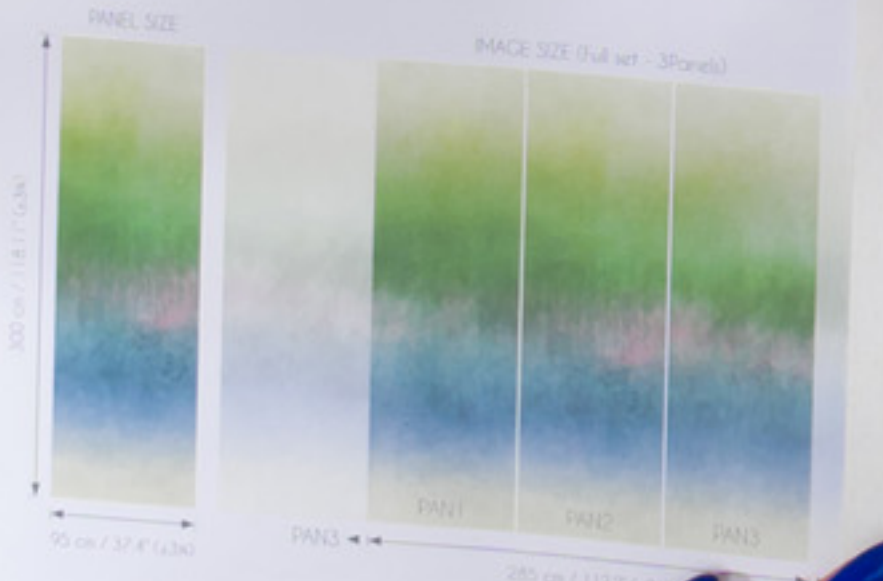

ID702 | BASALT



ID704 ID703

RAW



PROFIROL



PROFIROL




RAW

RAW

 Roll of backing	 Paper roll	 Fire resistant	 Scratchable	 Adhesive Type of adhesive for the surface and backing to the wall	 Light Resistance Color fastness	 How to remove Peelable	 Washability Waterproof
---	---	---	--	---	---	--	--

Technique/technology:
Weight: Digital print on non-woven backing
Thickness: ~545 g/m² (x 5k)
Type of support: 72 µm
Match: No woven 130 or
Random match
How to paste: Paste the wall
How to remove: Scippable

COLOR RANGE

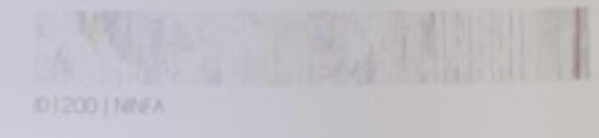

01/200 | N/A

N.B.
- The product is available also with a custom size for each project.
- For any request contact info@kloverhome.com
- The portrayed colours may differ from reality.



CONCRETE

PROFIROL




PROFIROL



ID13007 NIIFA

ID1302 BASALT

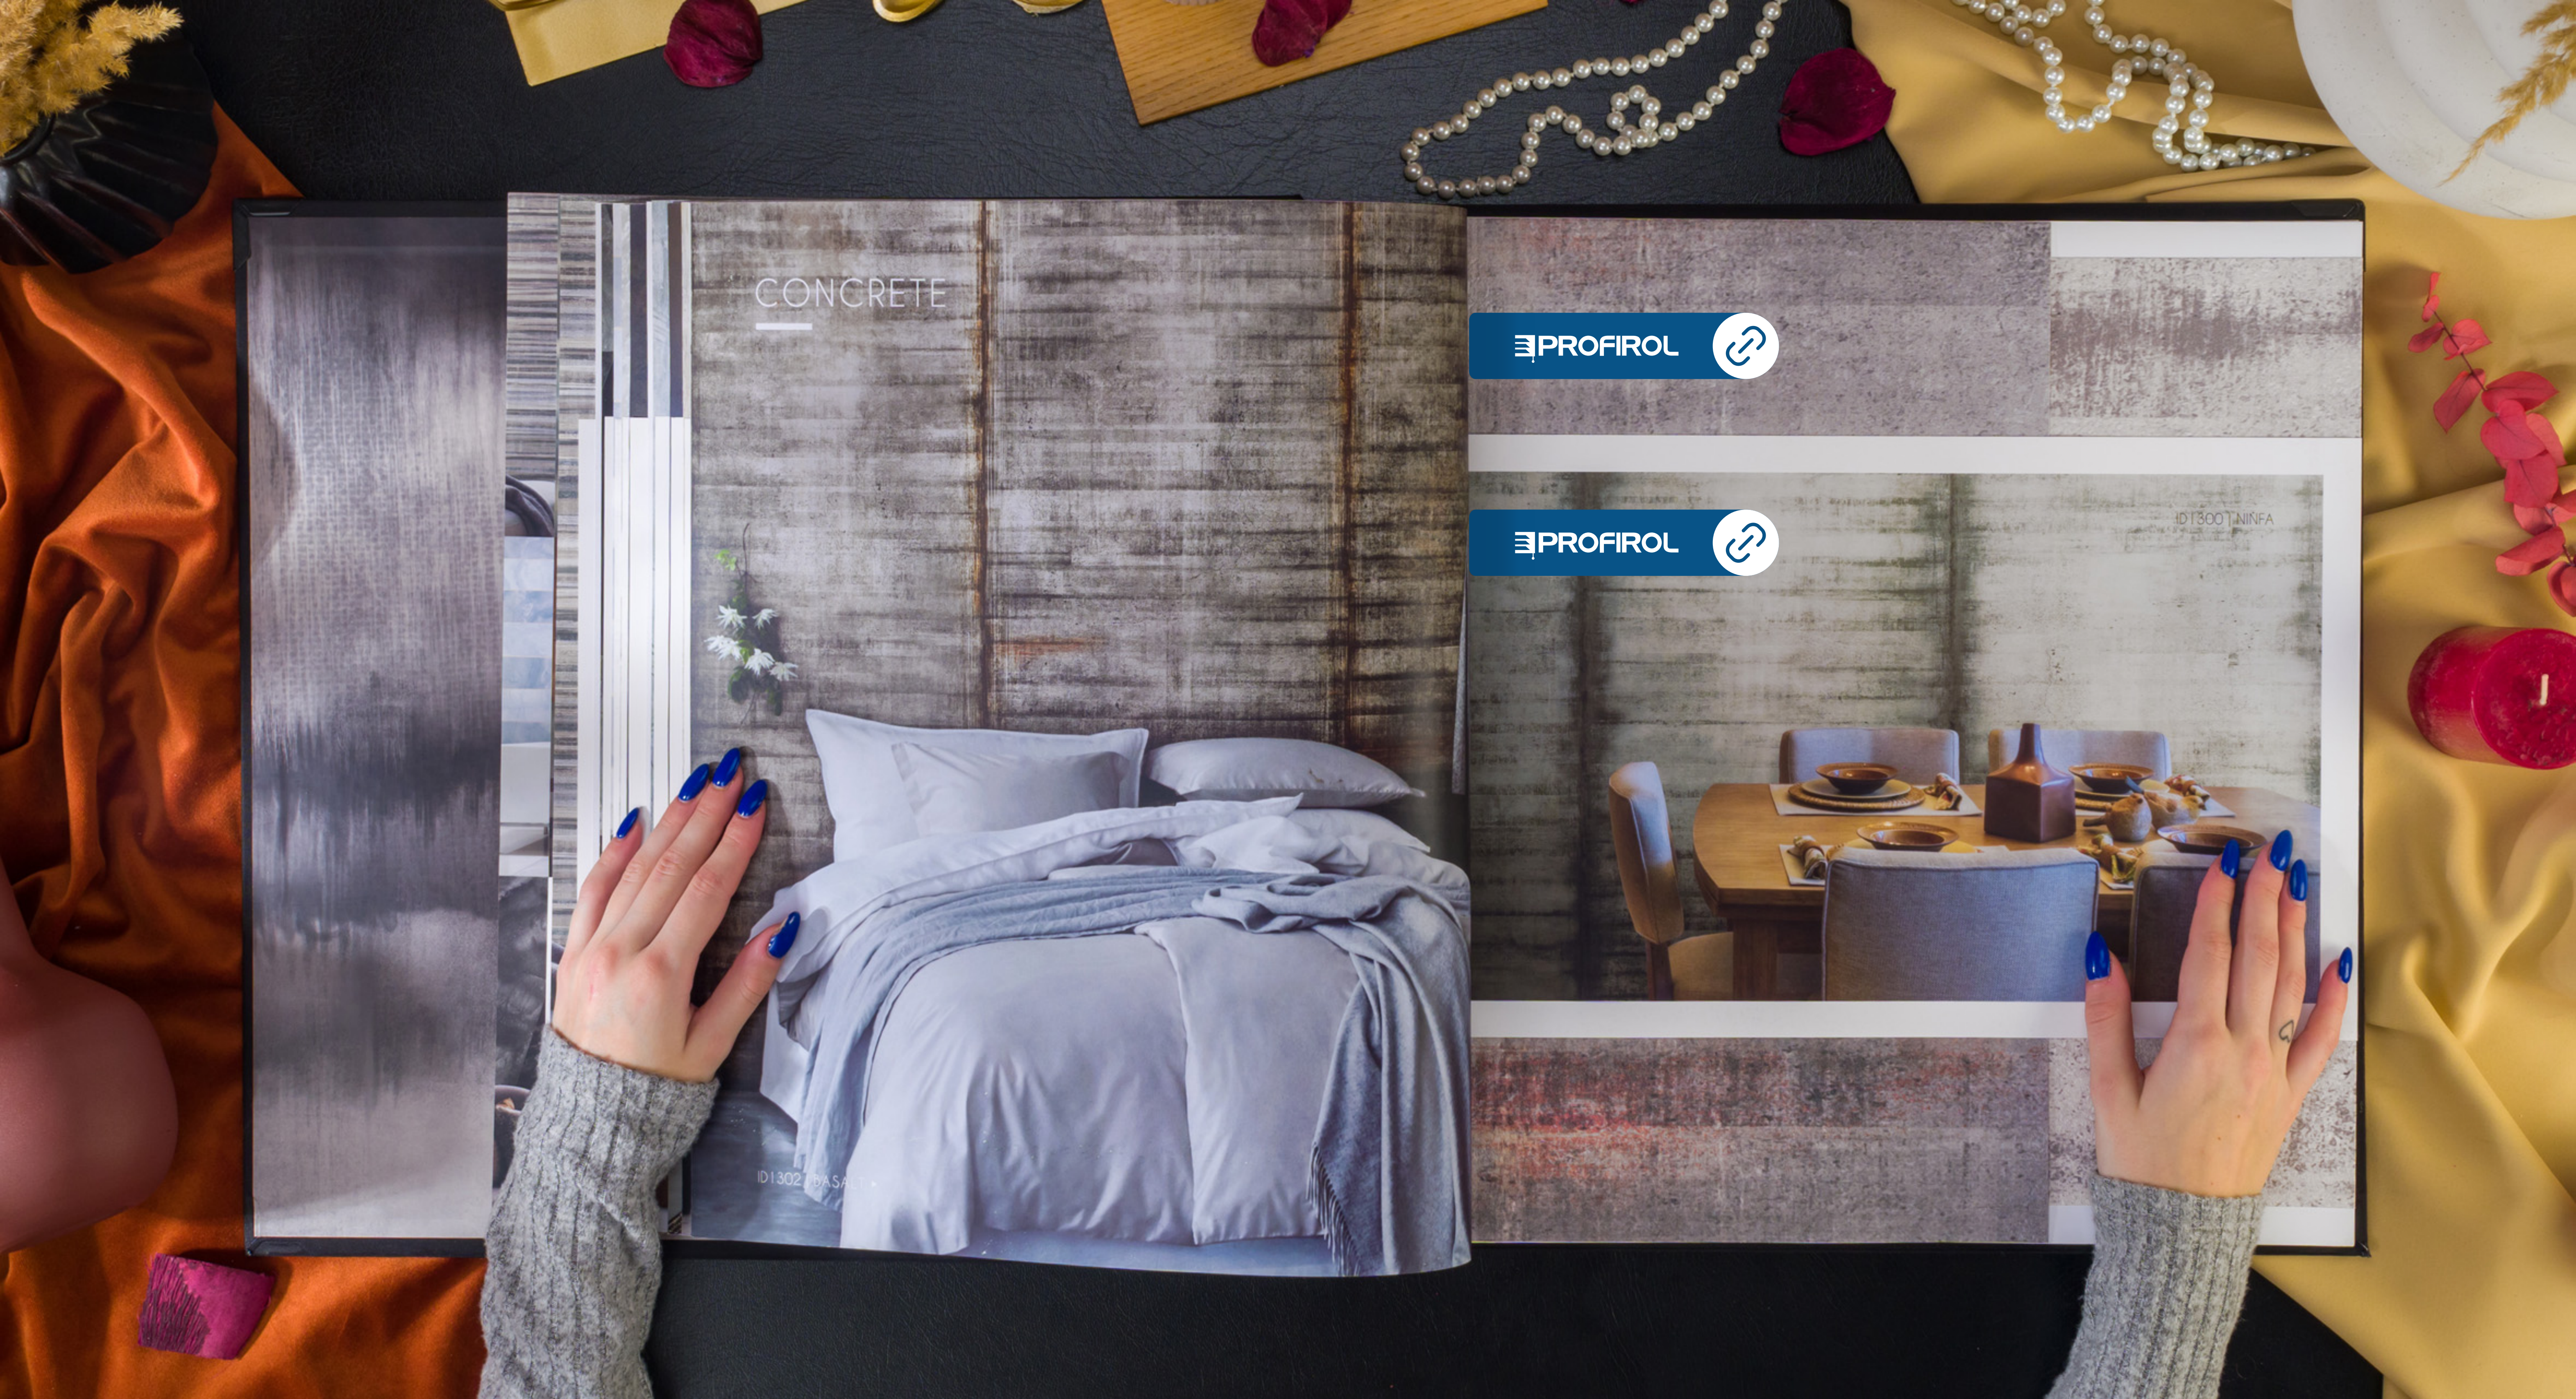

CONCRETE

CONCRETE



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:

Digital print on non-woven backing
≈545 g/m² (± 5%)
72 µm
No woven 130 gr
Random match
Paste the wall
Shippable

COLOR RANGE



N.B.
- the product is available also with a custom size for each project
for any request contact info@axambone.com
- the portrayed colours may differ from reality

ID13021 BASALT

PROFIROL



PROFIROL





CONCRETE S

PROFIROL



PROFIROL




ID 1405 | SEALING WAX ID 1400 | NINFA

ID 1402 | BASALT

400

CONCRETE S

CONCRETE S

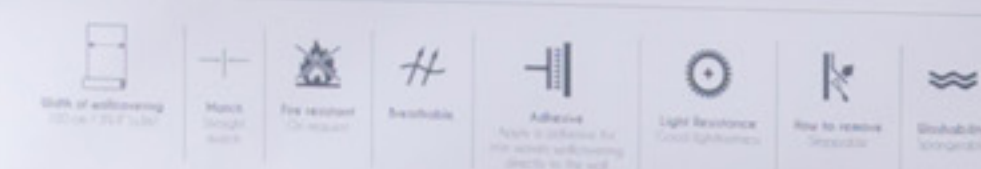

Technique/technology: Digital print on non-woven backing
Weight: ~5.45 g/m² (x 5m)
Thickness: 72 µm
Type of support: No woven / 30 gr
Match: Random match
How to paste: Paste the wall
How to remove: Stripable



ID 1402 | BASALT

COLOR RANGE



NB:
- The product is available also with a custom size for each project
for any request contact info@profirol.com
- The portrayed colours may differ from reality

PROFIROL



PROFIROL



PROFIROL






CONCRETE S

CONCRETE S

- Width of adhesion: 100 mm / 3.94"
- Water: 0.05 mm
- Fire resistance: F120
- Acoustic: 10
- Adhesive: Apply to substrate and/or adhesive (check the technical data sheet)

Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:

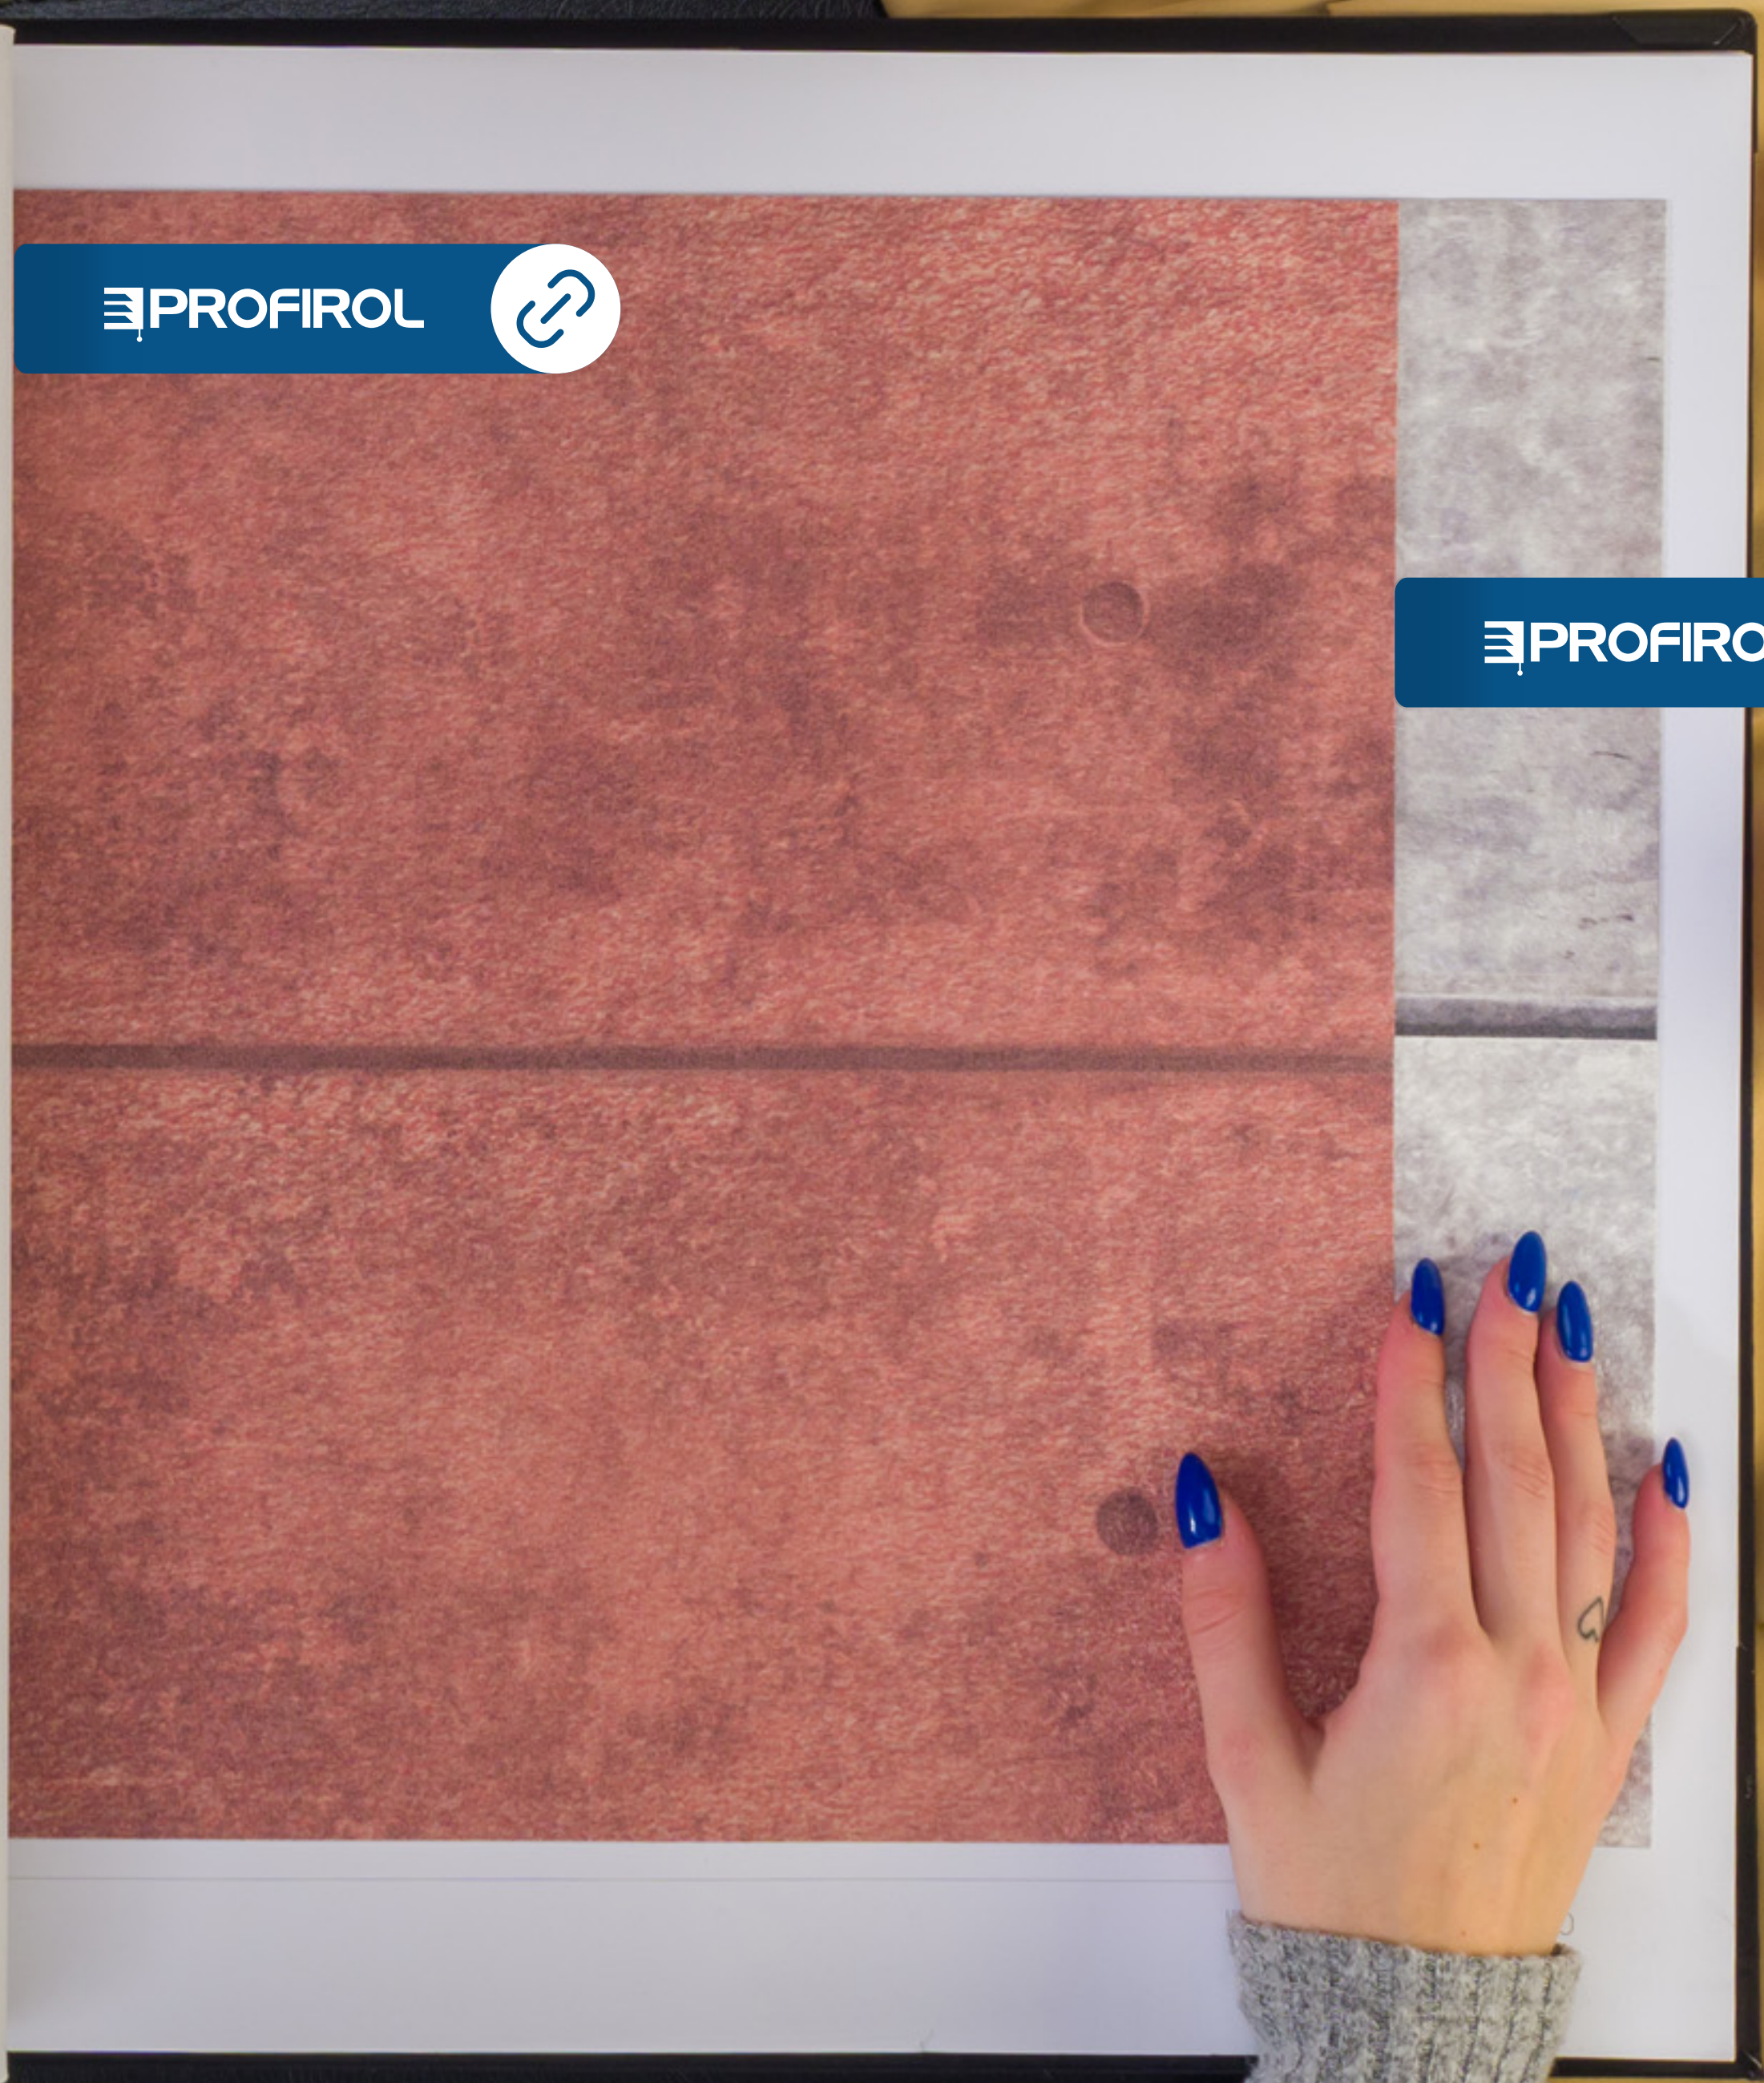

PROFIROL



PROFIROL





CONC

CONCRE



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:



PROFIROL 

INTERACTION

PROFIROL



PROFIROL




ID805 | SEALING WAX

ID804

ID803

ID805

ID801 | KAJAL

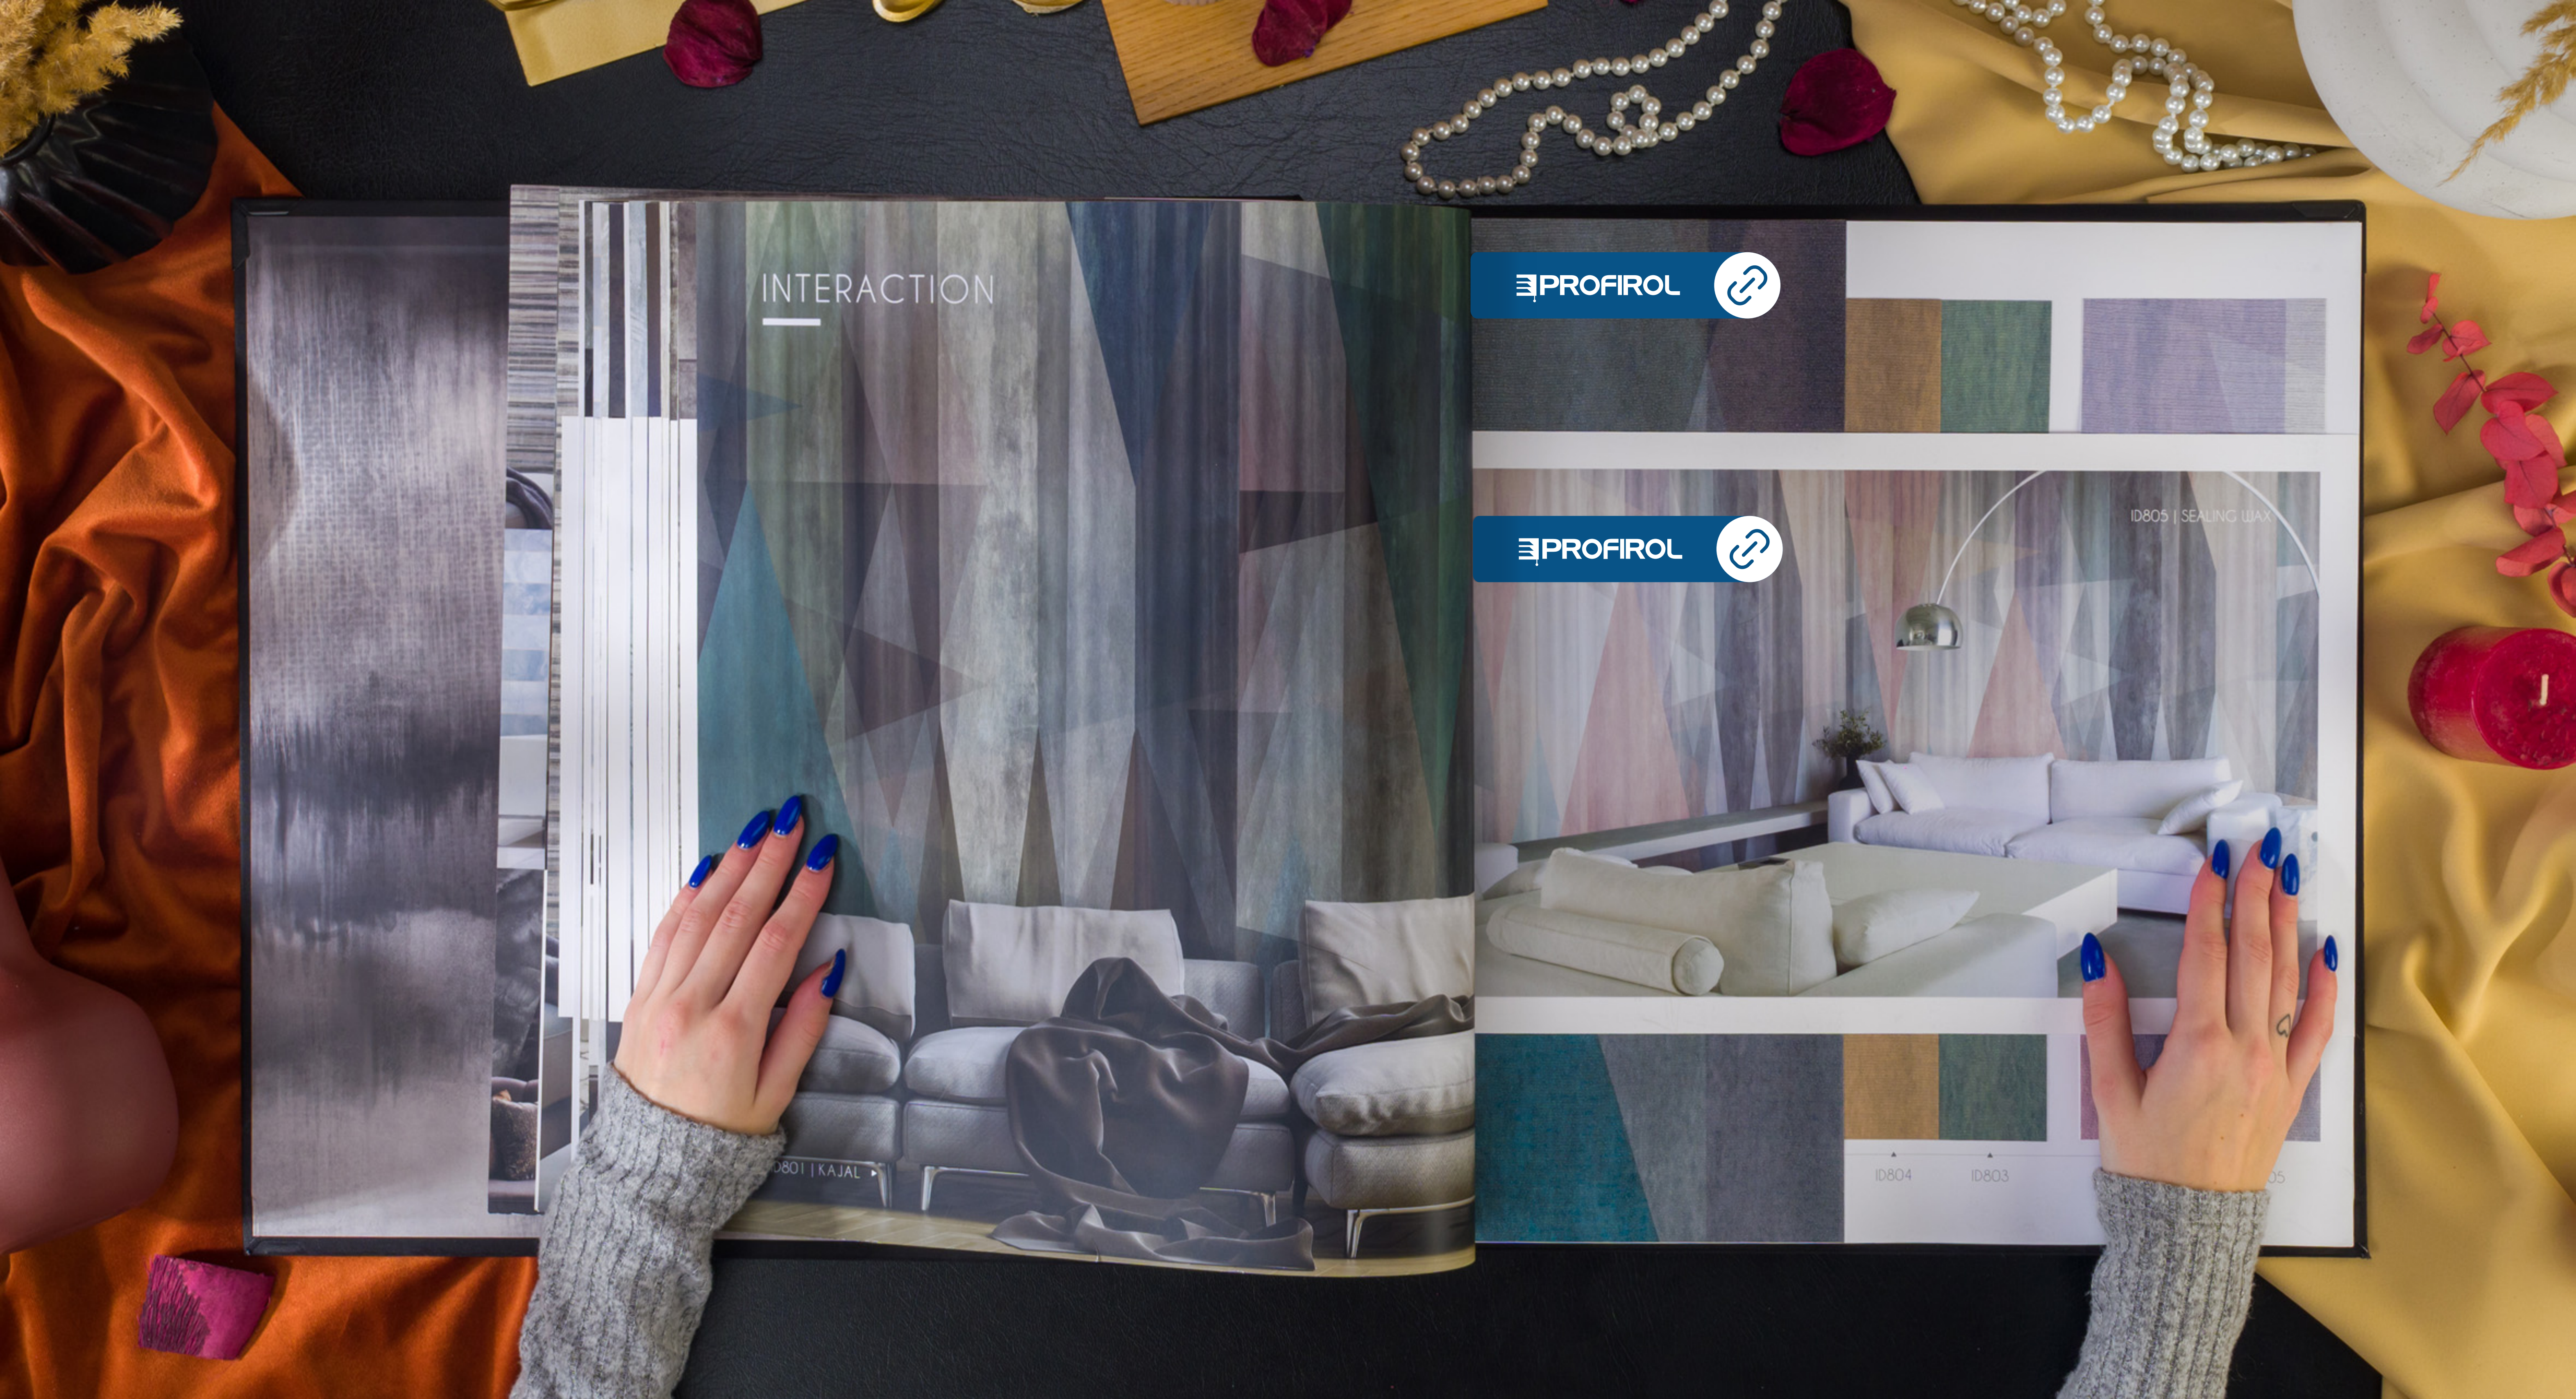

INTERACTION

INTERACTION



Technique/technology: Digital print on non-woven backing
Weight: ~183 g/m² (x 5k)
Thickness: 50 µm
Type of support: No woven / 130 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Strippable

COLOR RANGE



NB:
- the product is available also with a custom size for each project
- for any request contact info@profirool.com
- the portrayed colours may differ from reality



ID801 | KAJAL



ID804 ID803 ID805




INTERACTION

INTERACTION



Tecnicque/technology: Digital print on non-woven backing
Weight: ~163 g/m² (x 5kl)
Thickness: 50 µm
Type of support: No woven: 130 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Strippable

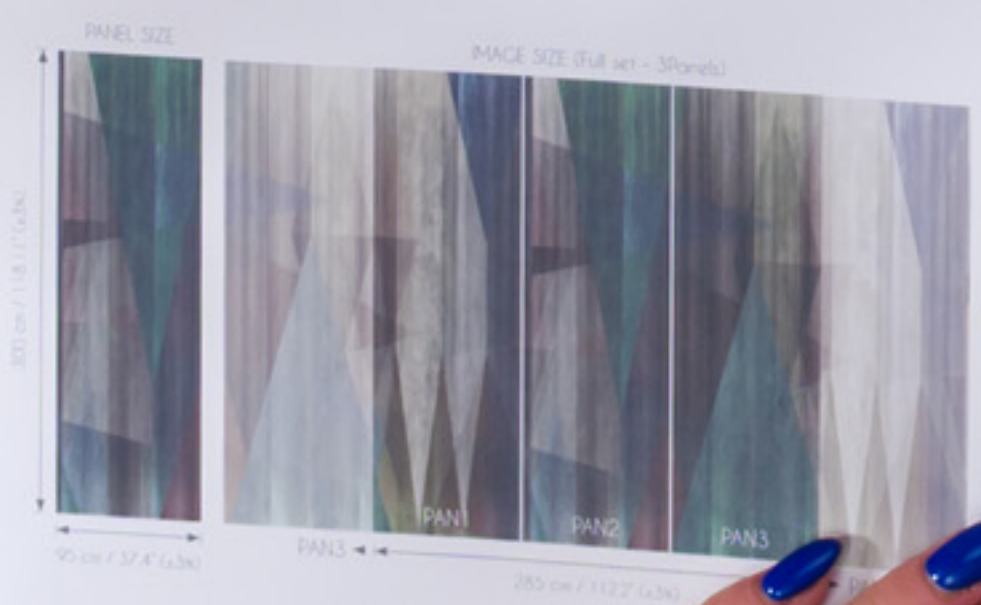

ID801 | KAJAL ▶



ID804 ID803 ID805

INTERACTION

INTERACTION



Technique/technology: Digital print on non-woven
Weight: 182
Thickness: 2,5 mm
Type of support: No support
Match: No match
How to paste: P
How to remove: P



ID801 | KAJAL




ID804 ID803 ID805



BORNEO

ID1605 | SEALING WAX

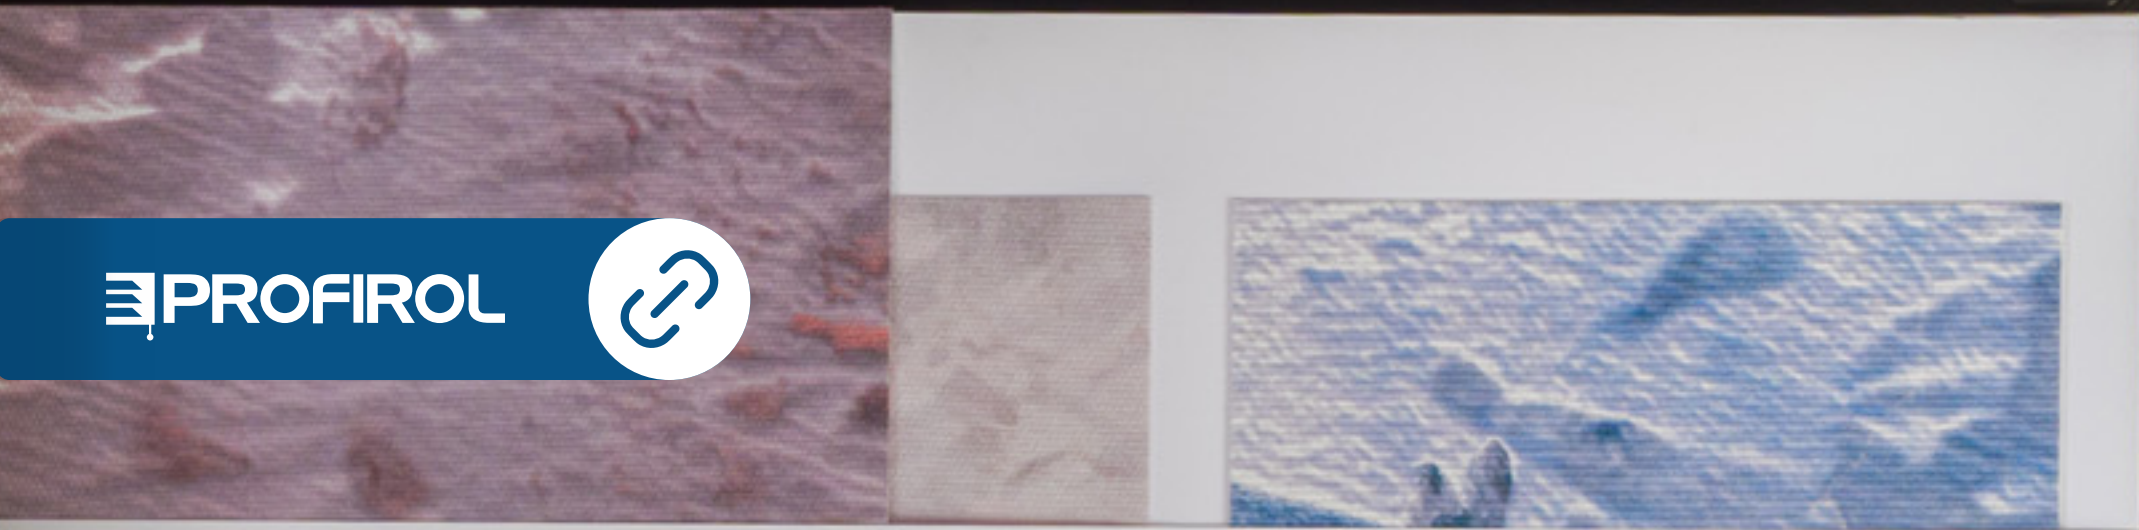

PROFIROL



PROFIROL



ID1600 | NINFA



ID1600

ID1603

BORNEO


BORNEO



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:

Digitally printed canvas:
~516 g/m² (± 5%)
97 µm
No woven | 30 gr
Straight match
Paste the wall
Strippable

COLOR RANGE

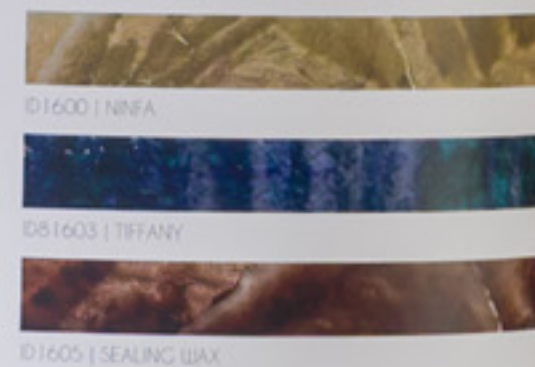

N.B.
The product is available also with a custom size for each panel.
For any request contact info@teawhore.com
The portrayed colours may differ from reality.



ID1605 | SEALING WAX ▶

PROFIROL



PROFIROL



PROFIROL



ID1600

ID1603

BORNEO

BORNEO




Technique/technology: Digitally printed canvas
Weight: ~0.16 g/m² (x 5x)
Thickness: 97 µm
Type of support: No woven 130 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Strippable



ID1605 | SEALING U



ID1600

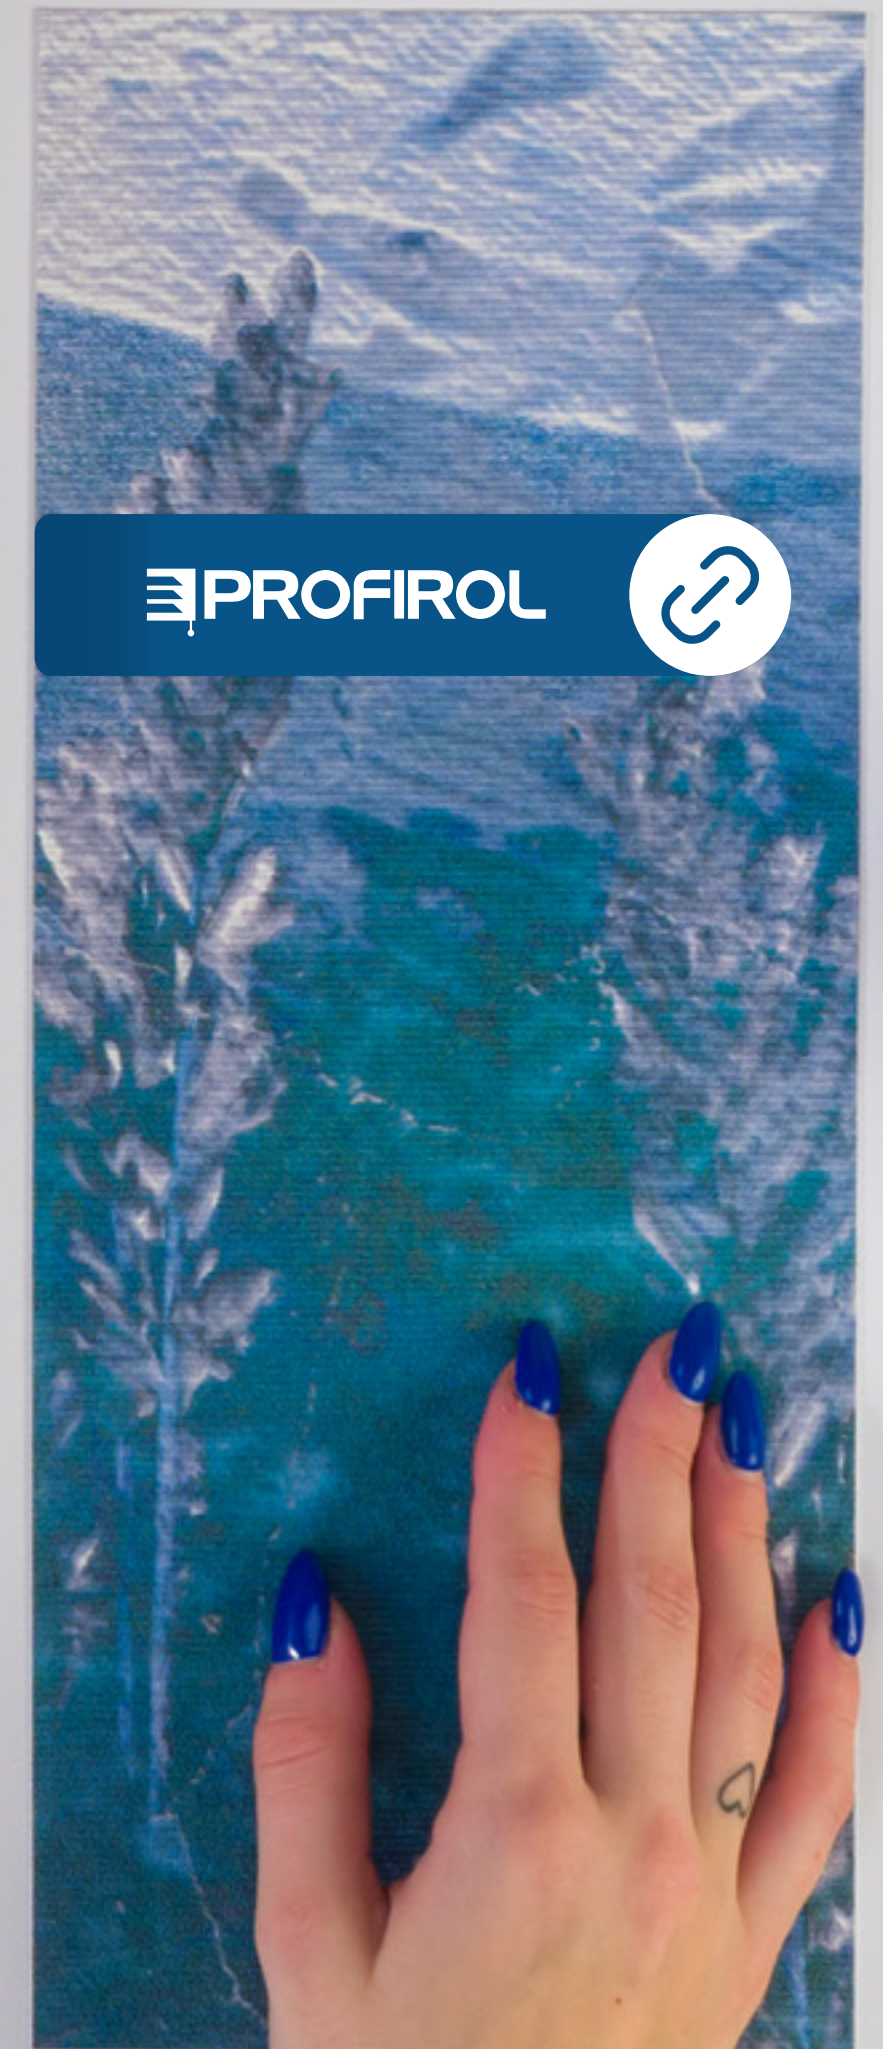

ID1603



MAYA

PROFIROL



PROFIROL



ID1504 | FILIGREE

ID1502 | BASALT

ID1504

ID1503

MAYA

MAYA




Technique/technology: Digital print on non-woven backing
Weight: ~163 g/m² (± 5%)
Thickness: 50 µm
Type of support: No woven, 130 gr
Match: Straight match
How to paste: Paste the wall
How to remove: Strippable



N.B. the product is available also with a custom size for each project. For any request contact info@texonhore.com. The portrayed colours may differ from reality.

ID1502 | BASALT ▶

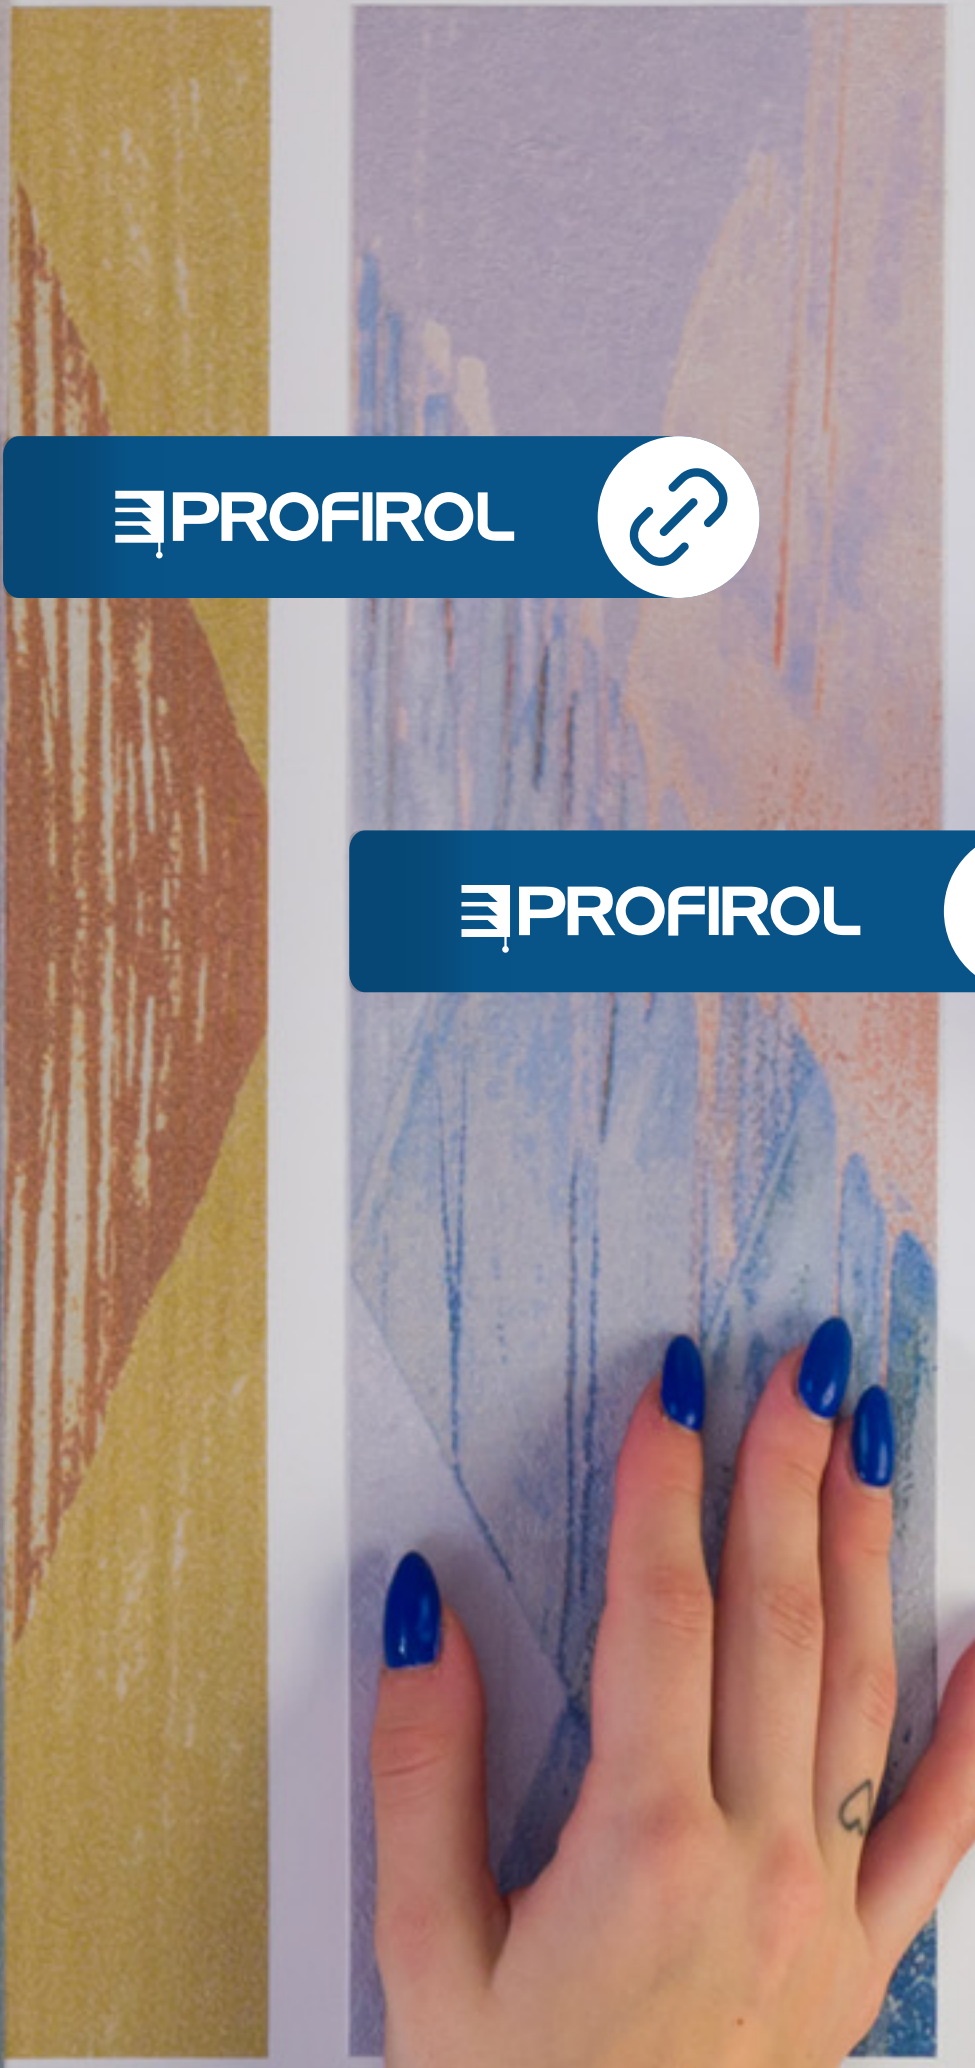

ID1504

ID1503



MAYA

MAYA

- State of adhesion: To be pasted on a wall
- Match: Straight match
- Fire resistant: Class B-s1, d0
- Breathable
- Adhesive: Apply to substrate, not to the paper (self-adhesive)
- Light resistance: Good resistance
- How to remove: Wet removal

Technique/technology: Digital print on non-woven
 Weight: 110 g/m²
 Thickness: 0.3 mm
 Type of support: No
 Match: Straight
 How to paste: Apply to substrate, not to the paper
 How to remove: Wet removal



ID1504



MIST

MIST



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:

Digital print on non-woven backing
=183 g/m² (x 5x)
50 µm
No woven 130 gr
Straight match:
Paste the wall
Stripable



N.B.
- the product is available also with a custom size for each project
for any request contact info@aquarhome.com
- the portrayed colours may differ from reality




ID903 ID905

MIST

MIST



Technique/technology: Digital print on non-woven
Weight: ~163 g/m²
Thickness: No wave
Type of support: Straight
Match: Patch
How to paste: Patch
How to remove: S

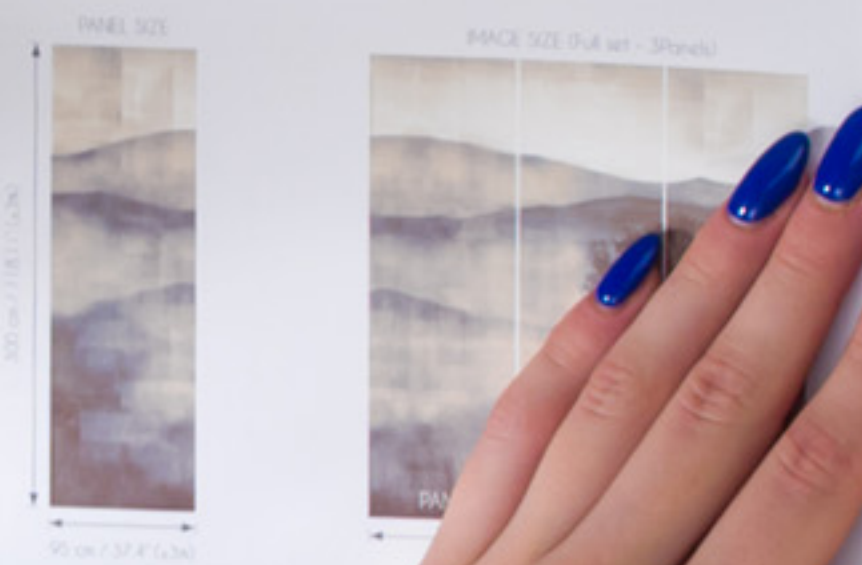

ID900 | NINFA

PROFIROL



PROFIROL



PROFIROL



ID901

ID903

MIST

MIST



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:



ID900 | NI



ID901

ID903


MIST

MIST



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:

PANEL SIZE



PROFIROL



ID901

ID903

PROFIROL



AQUARELL



KAJAL

PROFIROL



PROFIROL



ID1105 | SEALING WAX




ID1105

ID1103



AQUARELL

AQUARELL

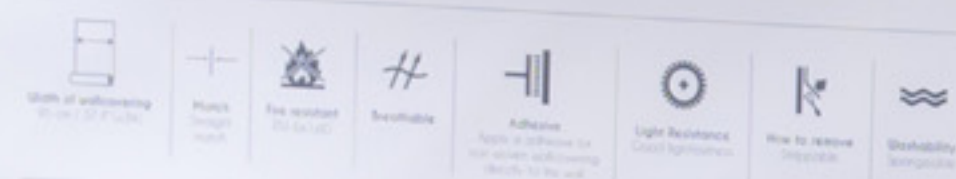

Technique/technology:

Weight:

Thickness:

Type of support:

Match:

How to paste:

How to remove:

Digital print on non-woven backing

~183 g/m² (± 5%)

50 µm


No woven 1:30 or

Straight match

Paste the wall

Strippable

COLOR RANGE



ID1100 | NIVA

ID1101 | KAJAL


ID1102 | BASALT

ID1103 | TRIFANY

ID1105 | SEALING WAX

N.B.

- the product is available also with a custom size for each project
- for any request contact info@profirol.com
- the portrayed colours may differ from reality

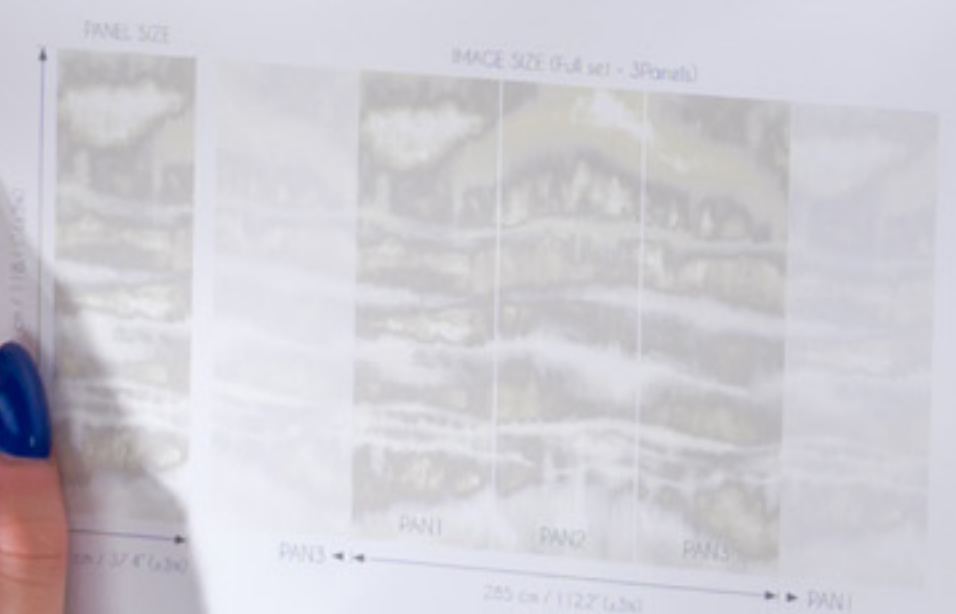

PROFIROL



PROFIROL



PROFIROL




PROFIROL



ID1105 ID1103

AQUARELL

AQUARELL

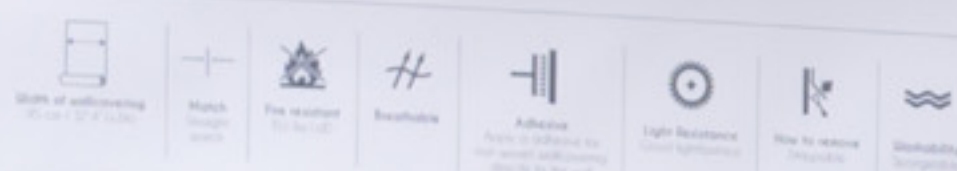

Technique/technology:

Weight:

Thickness:

Type of support:

Match:

How to paste:

How to remove:

Digital print on non-woven backing
~183 g/m² (x 36)
50 µm
No woven 130 gr
Straight match
Paste the wall
Stripable



ID1101 |KAJAL



ID1105 ID1103

AQUARELL

AQUARELL



Technique/technology: Digital print on non-woven
Weight: +15
Thickness: No
Type of support: No
Match: No
How to paste: No
How to remove: No



ID1101 | KAJAL

PROFIROL



PROFIROL



ID1105

ID1103

PROFIROL



TRANSITION TROPIC



TIFFANY ▶

PROFIROL



PROFIROL




ID1005 | SEALING WAX

ID1005

ID1001

TRANSITION TROPIC

TRANSITION TROPIC

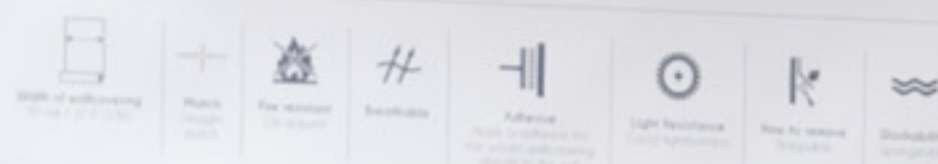

Technique/technology:

Weight:

Thickness:

Type of support:

Match:

How to paste:

How to remove:

Digitally printed canvas

~0.16 g/m² (x 2x)

97 µm

No woven 130 gr

Straight match

Paste the wall

Stripable

COLOR RANGE



N.B.

- The product is available also with a custom size for each project. For any request contact info@profirrol.com
- The promoted colours may differ from reality.

PROFIROL



PROFIROL



PROFIROL



PROFIROL



ID1002


TRANSITION TROPIC

TRANSITION TROPIC



Technique/technology:
Weight:
Thickness:
Type of support:
Match:
How to paste:
How to remove:

Digitally printed canvas
~516 g/m² (± 5%)
97 µm
No woven (30 gr)
Straight match
Paste the wall
Stripable

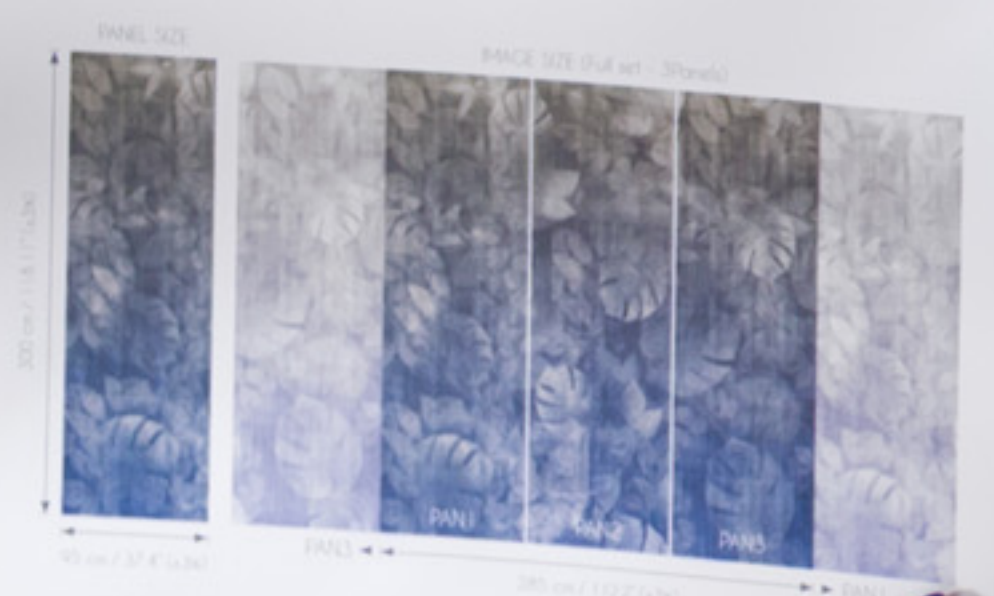


ID 1003 | TIFFANY



ID 1002

TRANSITION TROPIC

TRANSITION TROPIC



Technique/technology:

Weight:


Thickness:

Type of support:

Match:

How to paste:

How to remove:

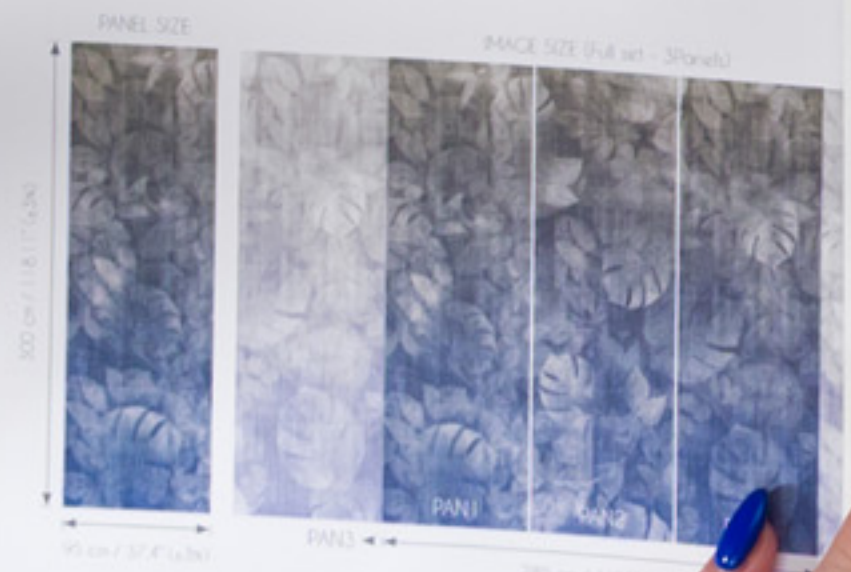

ID1003 | TIFFANY ▶

PROFIROL



PROFIROL



ID1001

ID1002

PROFIROL

